

FIXTURE INSTALLATION INSTRUCTIONS

ver. 2020

Introduction:

Carefully read and follow the contents of these instructions in sequence for the correct step-by-step procedure to assemble the fixture.

In the event of assembly problems or missing hardware, please contact Customer Service for assistance at 800-662-8640 x0, Monday - Friday, 8:30am - 5:00pm CST.

CAUTION!

Assembled fixture is very heavy. Do not attempt to lift or move without assistance.

Tools Required:

- | | |
|---------------------------------------|-------------------|
| - Power Drill | - Bubble Level |
| - #2 Square Drive Bit | - 1/4" Nut Driver |
| - Slotted Screwdriver | - Tape Measure |
| - Phillips Head Screwdriver | |
| - 3/16" Concrete Drill Bit (included) | |


TABLE OF CONTENTS

Section 1: Installation Preparation & Hardware	2
Section 2: Install Structure	4
Section 3: Install Top Sign	12
Illuminated Panel Kit (Optional Add-On)	15
Section 4: Component Installation Guide	17
Section 5: Install Storage Cabinets (Optional Add-On)	18
Section 6: Install Shelves	23
Section 7: Install Side Panel Kit (Optional Add-On)	26
Section 8: Install Pushers	31

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Installation Preparation - 1.1


STEP 1: Unpack And Identify AIM Fixture Components

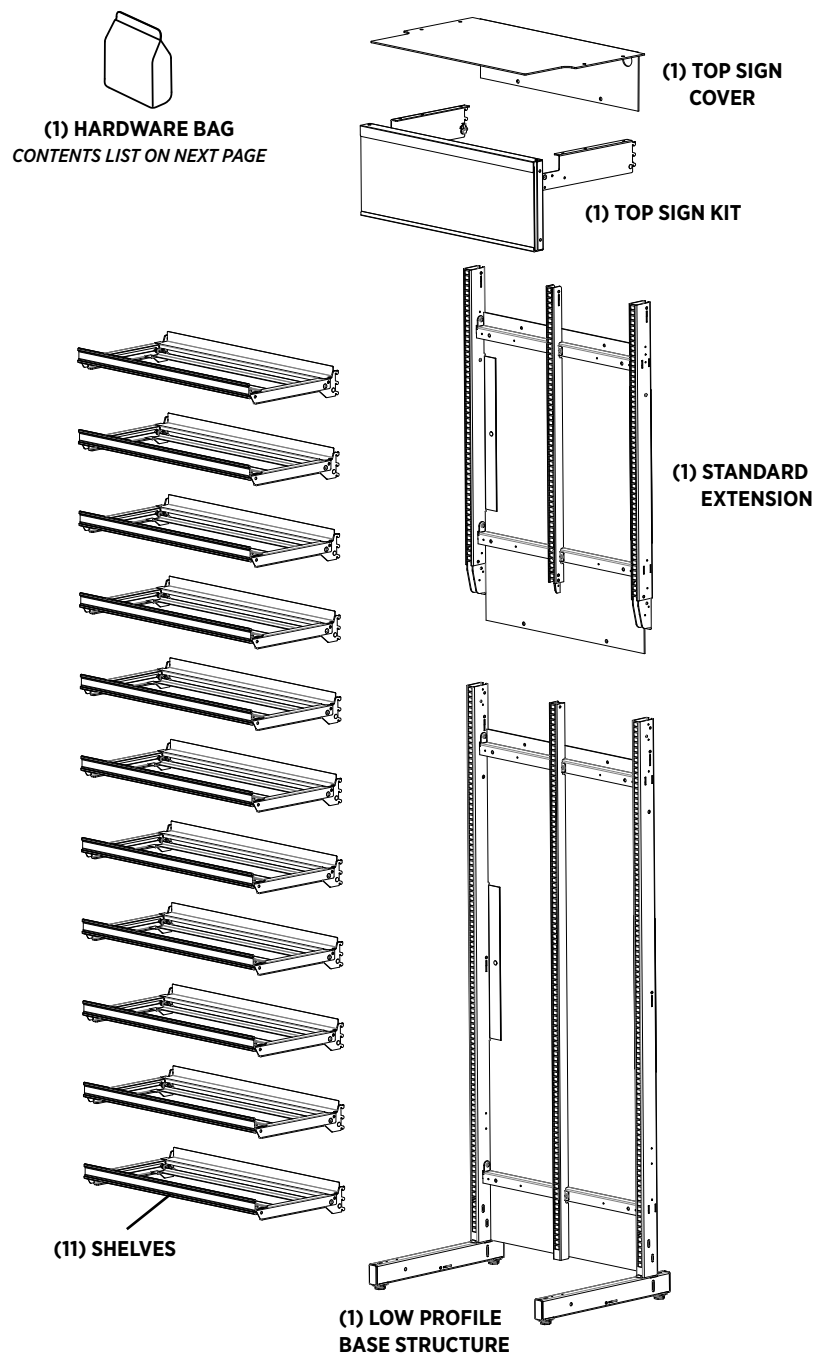

STEP 2: Remove Top Sign And Shelves From Base Structure

Remove Top Sign Cover and set aside. Pivot rotating shelf locks on Top Sign side brackets away from the slots in leg uprights. Grip side brackets of Top Sign, lift directly upward, then tilt assembly toward leg uprights to release **(DETAIL 2)**.

Repeat process to remove all shelves from slotted leg uprights and set shelves aside until instructed.

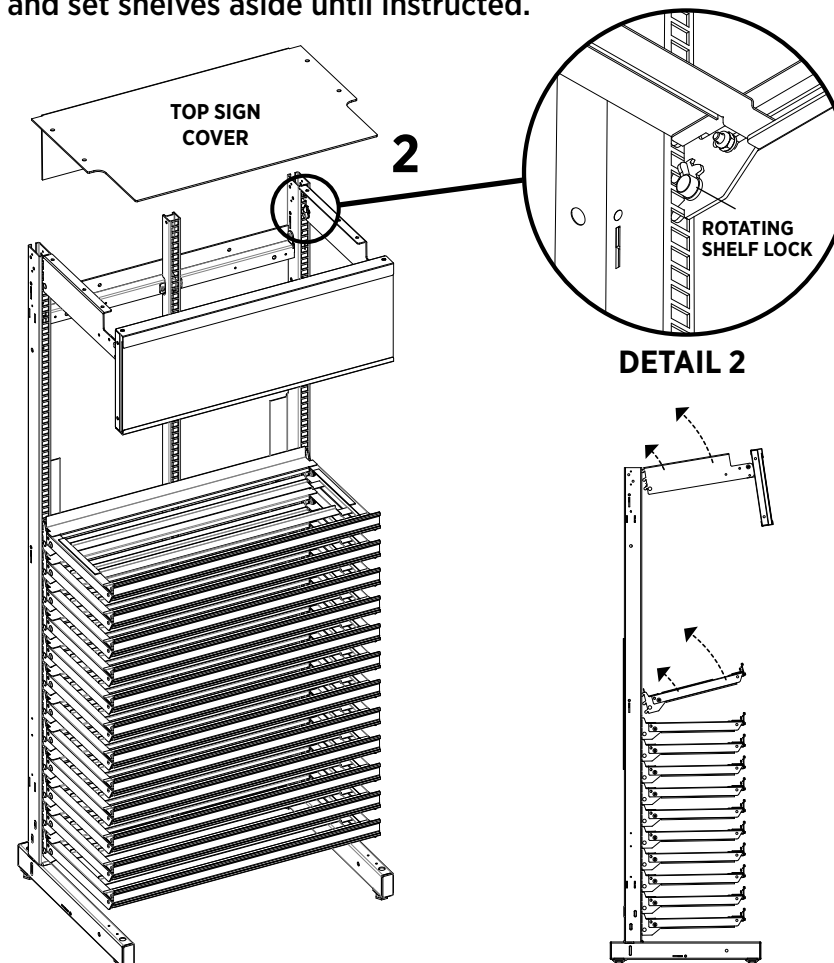


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.


Installation Preparation - 1.2

Hardware Bag Contents - Included With Each AIM Standard Fixture Set


Wall Attaching Hardware

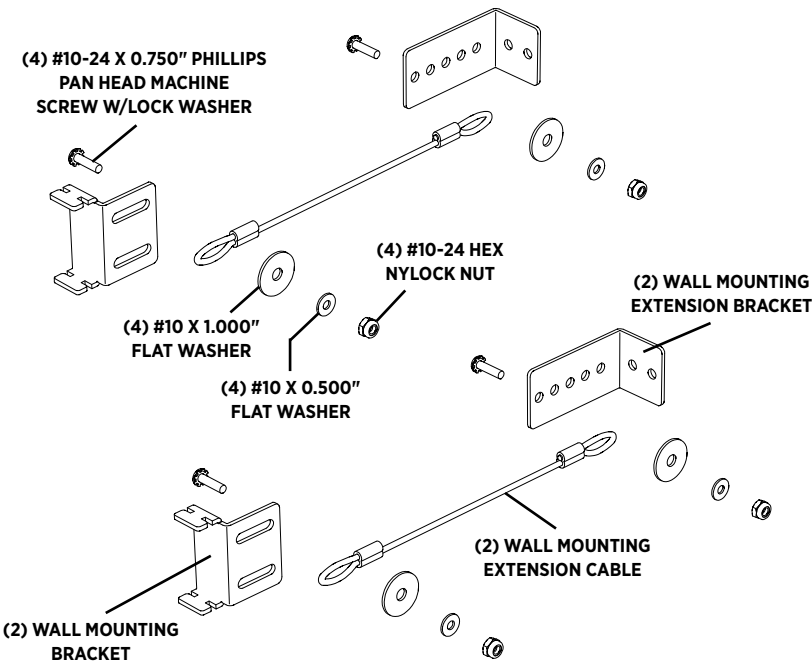


Leg Attaching Hardware

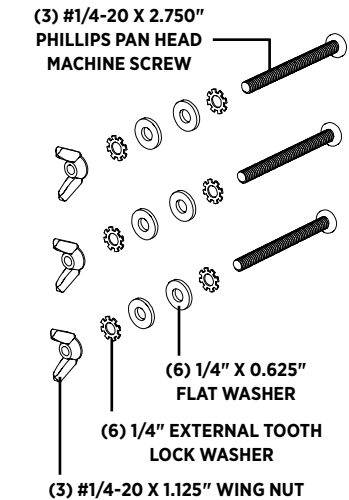


Top Sign Kit Hardware

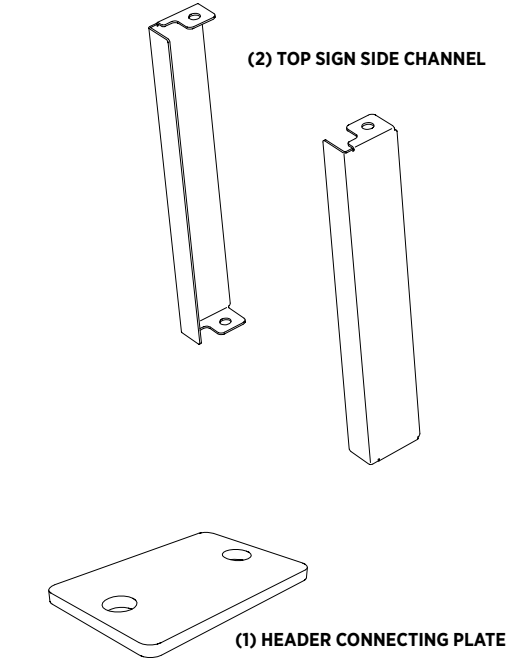


Floor Attaching Hardware

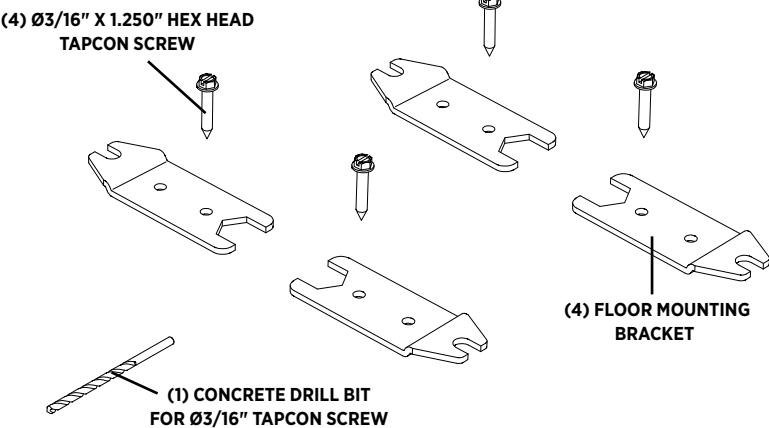


Standard Extension Connecting Hardware

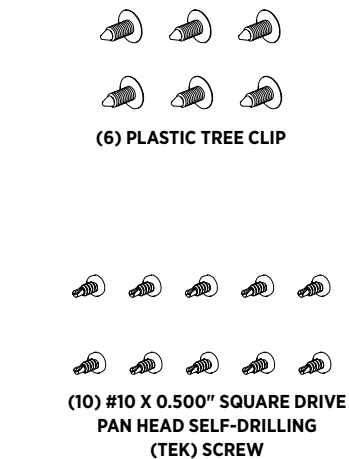

Shelf Installation Accessories

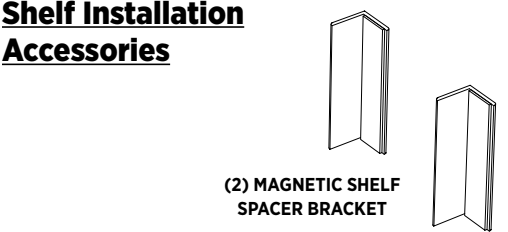

Install Structure - 2.1

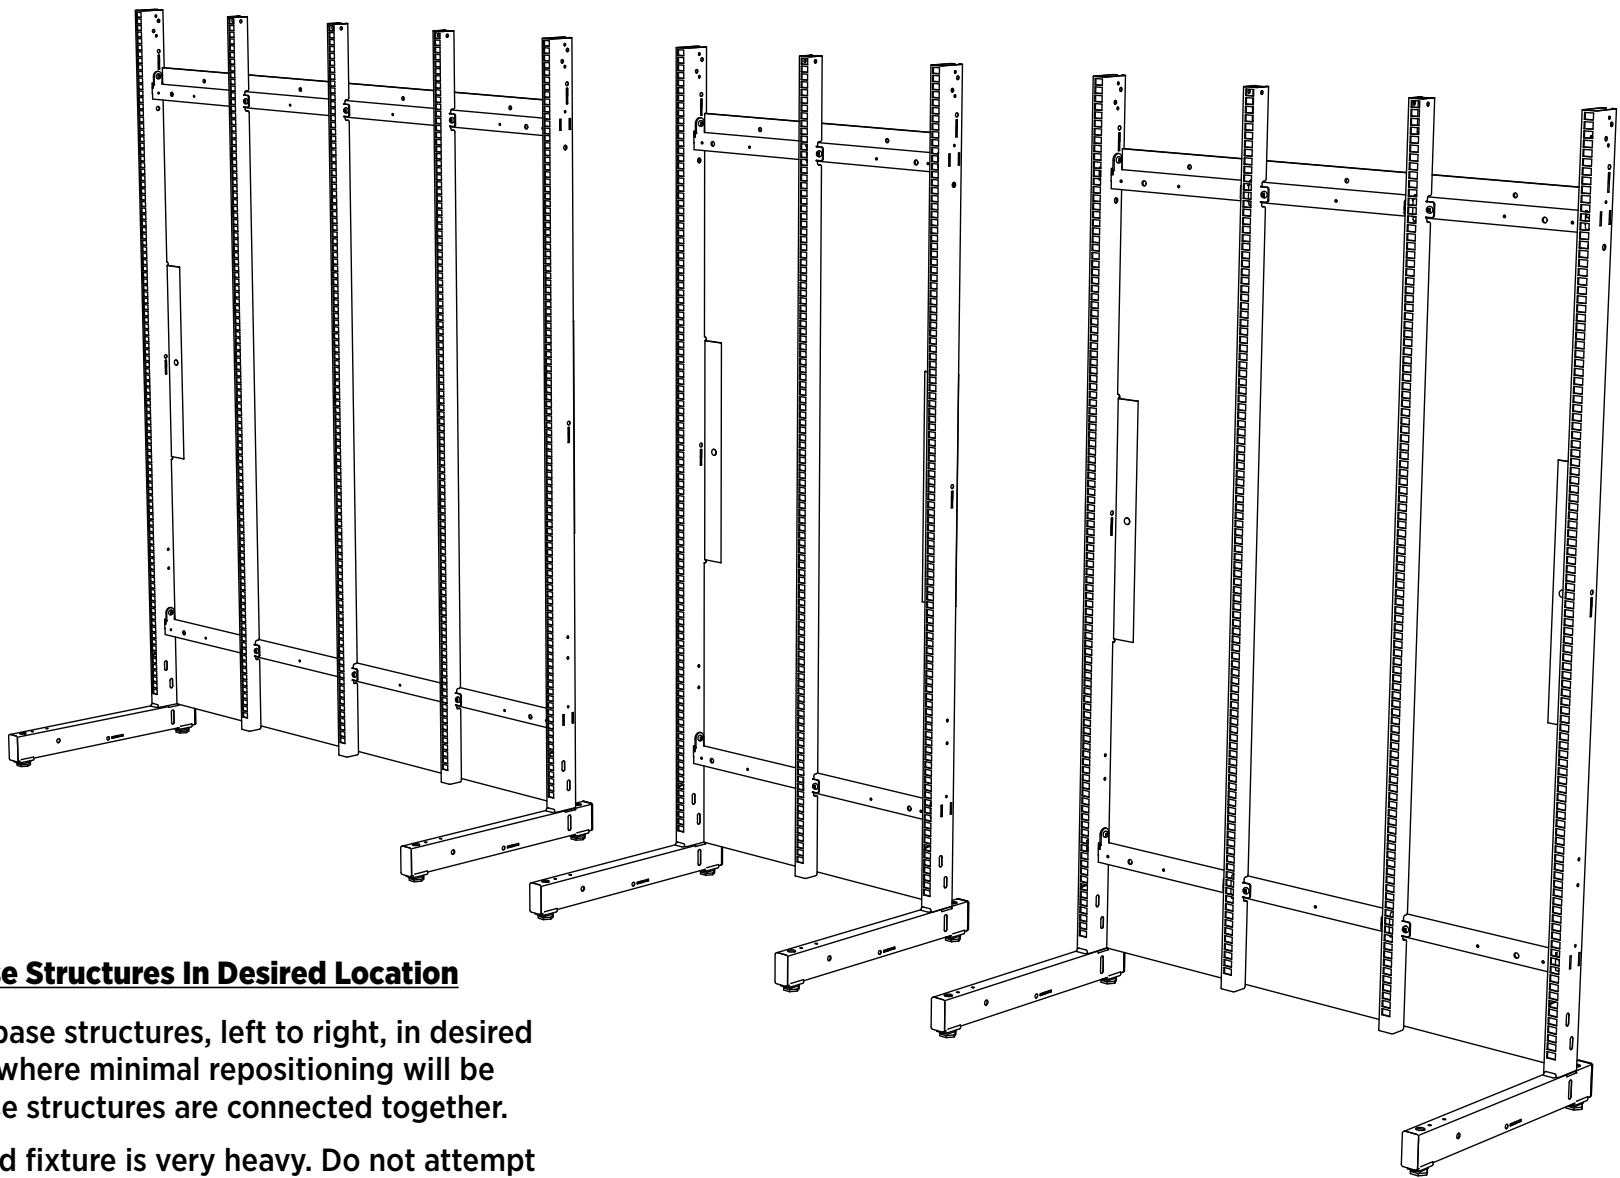

STEP 3: Position Base Structures In Desired Location

Position low profile base structures, left to right, in desired installation location where minimal repositioning will be required after all base structures are connected together.


CAUTION! Assembled fixture is very heavy. Do not attempt to lift or move without assistance.

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Structure - 2.2

STEP 4: Connect Low Profile Base Structures Together

- Connect adjacent horizontal legs together using **(DETAIL 4A)**:
 - (1) #1/4-20 x 2.750" Phillips Pan Head Machine Screw
 - (2) 1/4" External Tooth Lock Washers
 - (2) 1/4" x 0.625" OD Flat Washers
 - (1) #1/4-20 Wing Nut
- Connect adjacent slotted uprights together using **(DETAIL 4B)**:
 - (1) #1/4-20 x 2.750" Phillips Pan Head Machine Screw
 - (2) 1/4" External Tooth Lock Washers
 - (2) 1/4" x 0.625" OD Flat Washers
 - (1) #1/4-20 Wing Nut
- Repeat hardware installation as required.

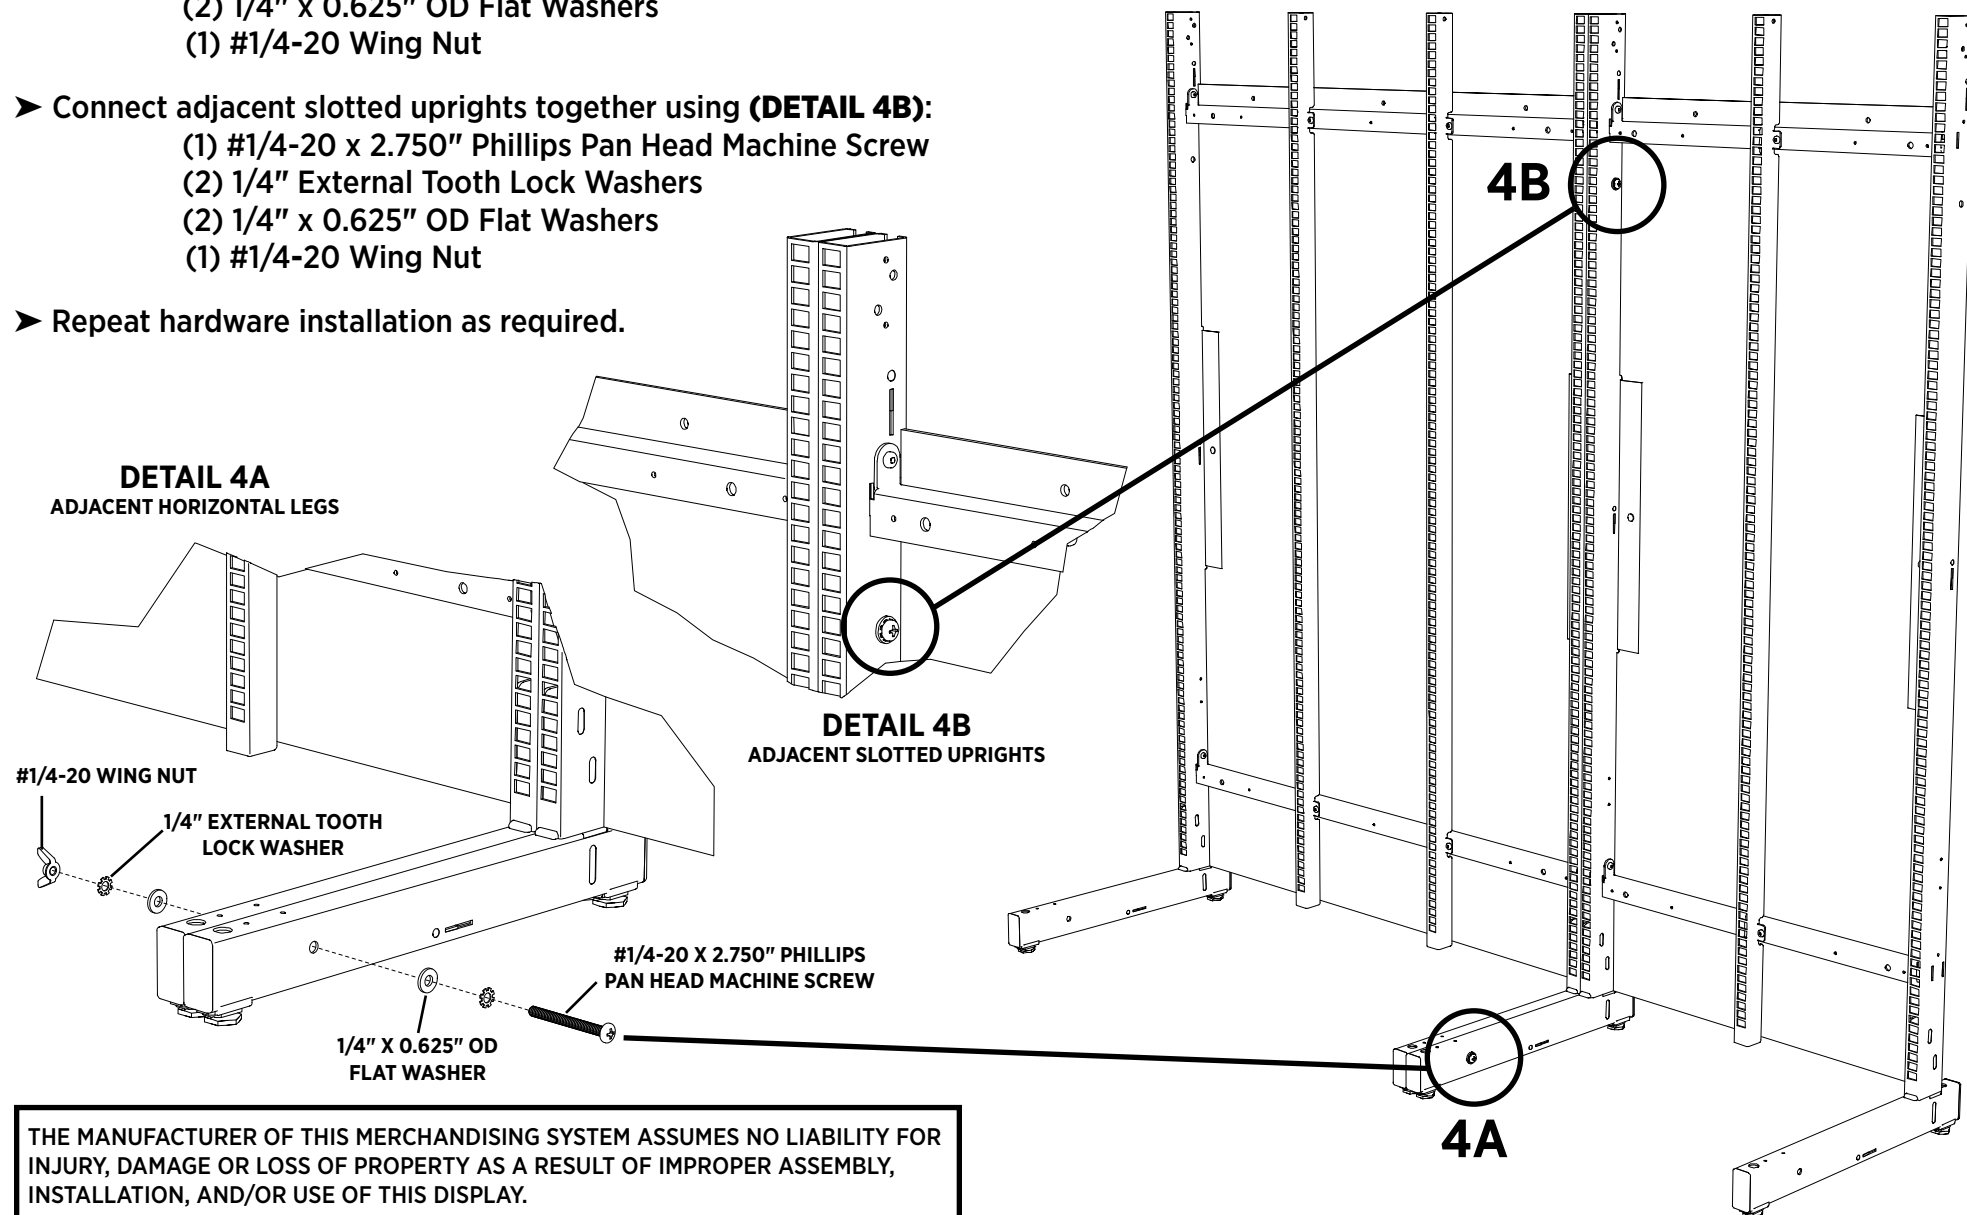


Install Structure - 2.3

STEP 5: Level & Align Assembled Low Profile Base Structures

Insert slotted screwdriver through front and back holes in top of horizontal leg braces to adjust levelers as required (**DETAIL 5A**).

IMPORTANT: If rear levelers cannot be accessed/adjusted using a screwdriver, use the hex end of a Floor Bracket as a wrench to adjust each leveler (**DETAIL 5B**).

Use bubble level in each section of display to ensure entire structure is level front to back, horizontally and vertically.


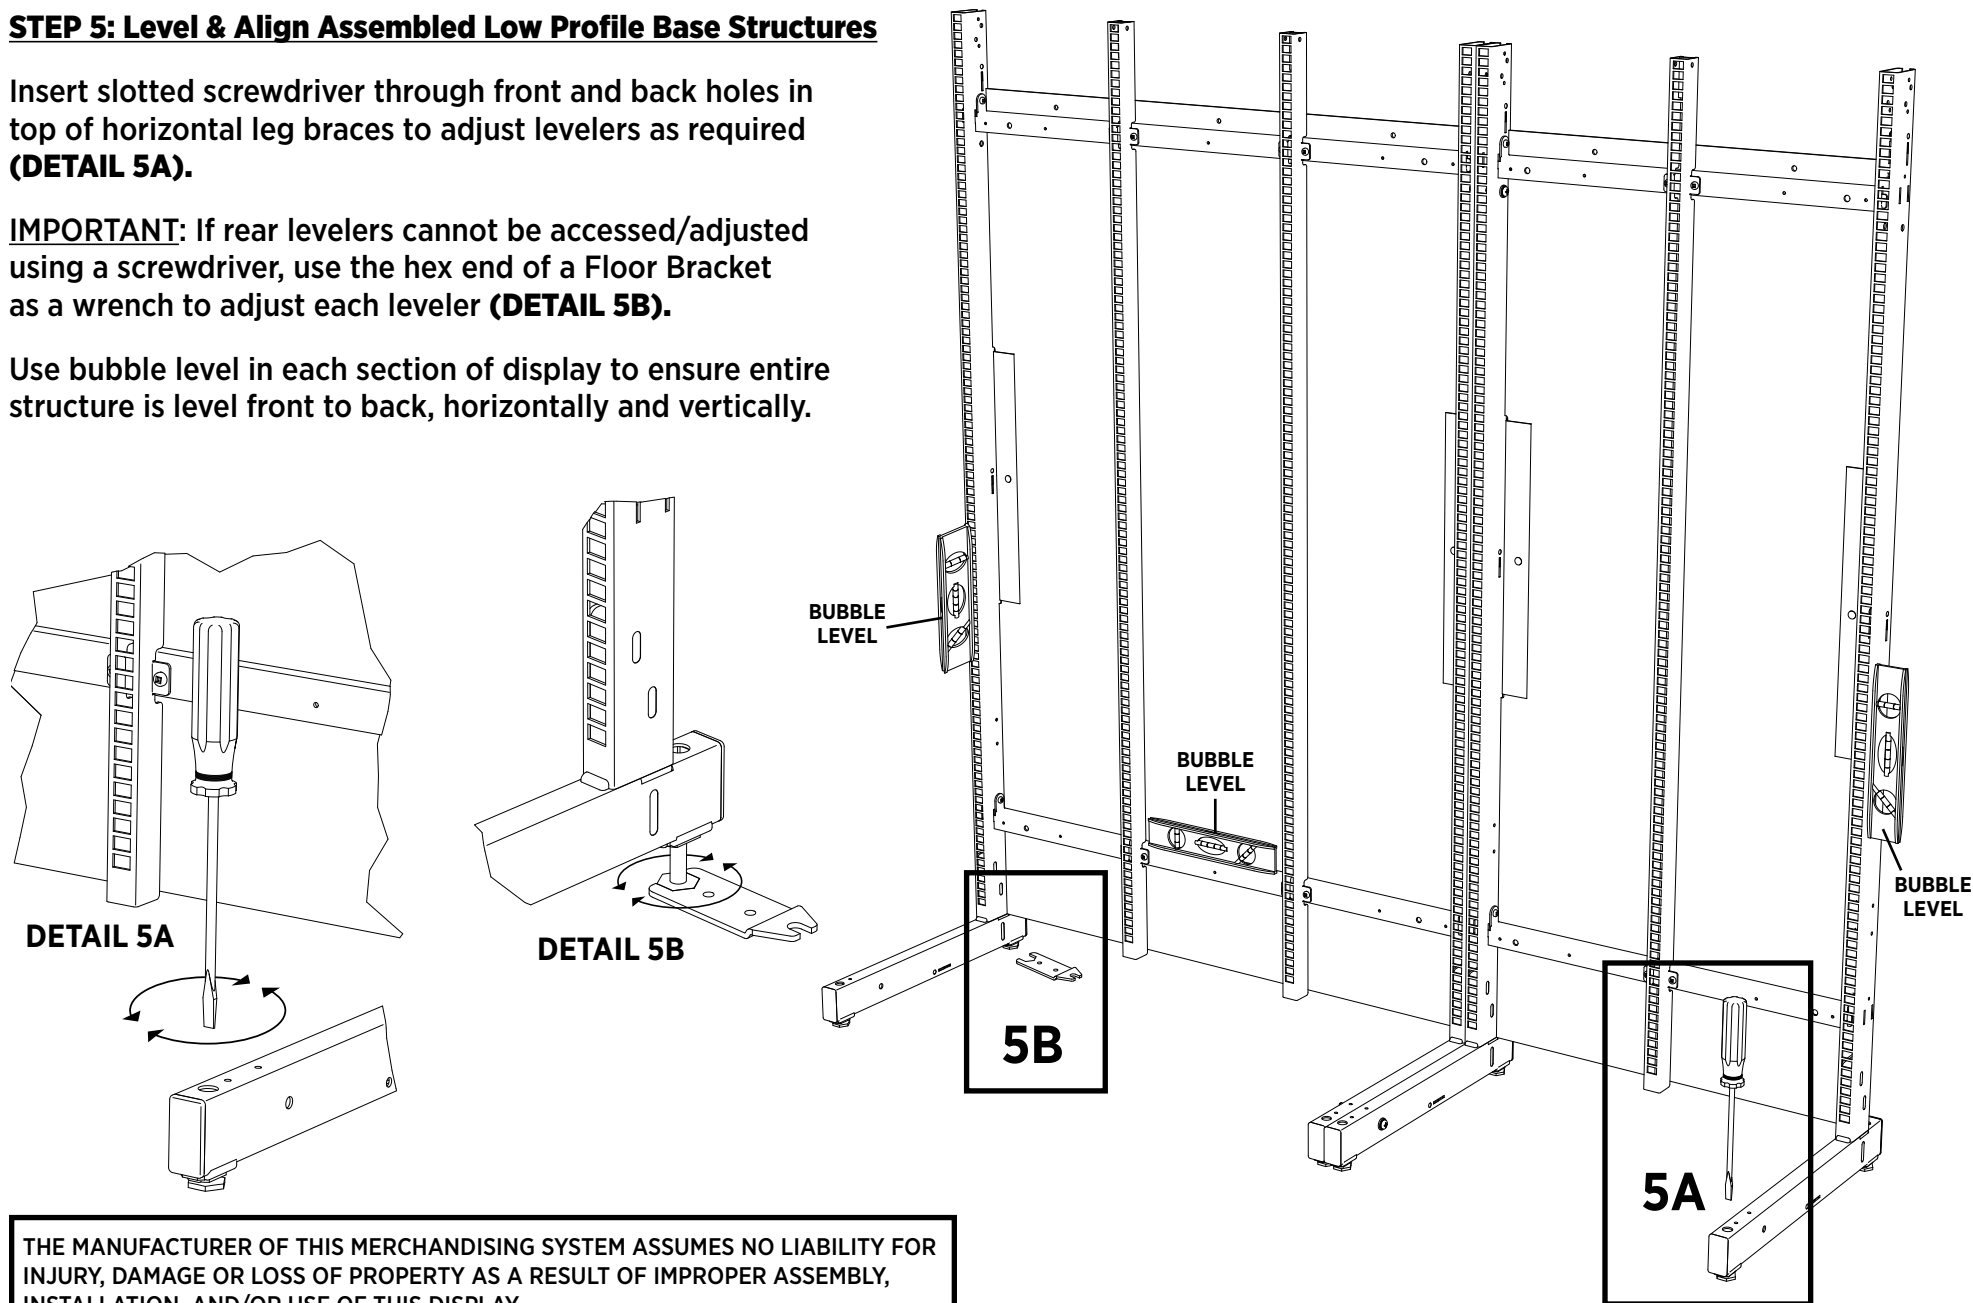


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Structure - 2.4

STEP 6: Install Anti-Tip Floor Brackets To Base Structure

For safety and stability, Anti-Tip Floor Brackets must be installed over every leveler in the base structural assembly. Refer to DETAIL 6A, below, for correct placement and positioning of Anti-Tip Floor Brackets.

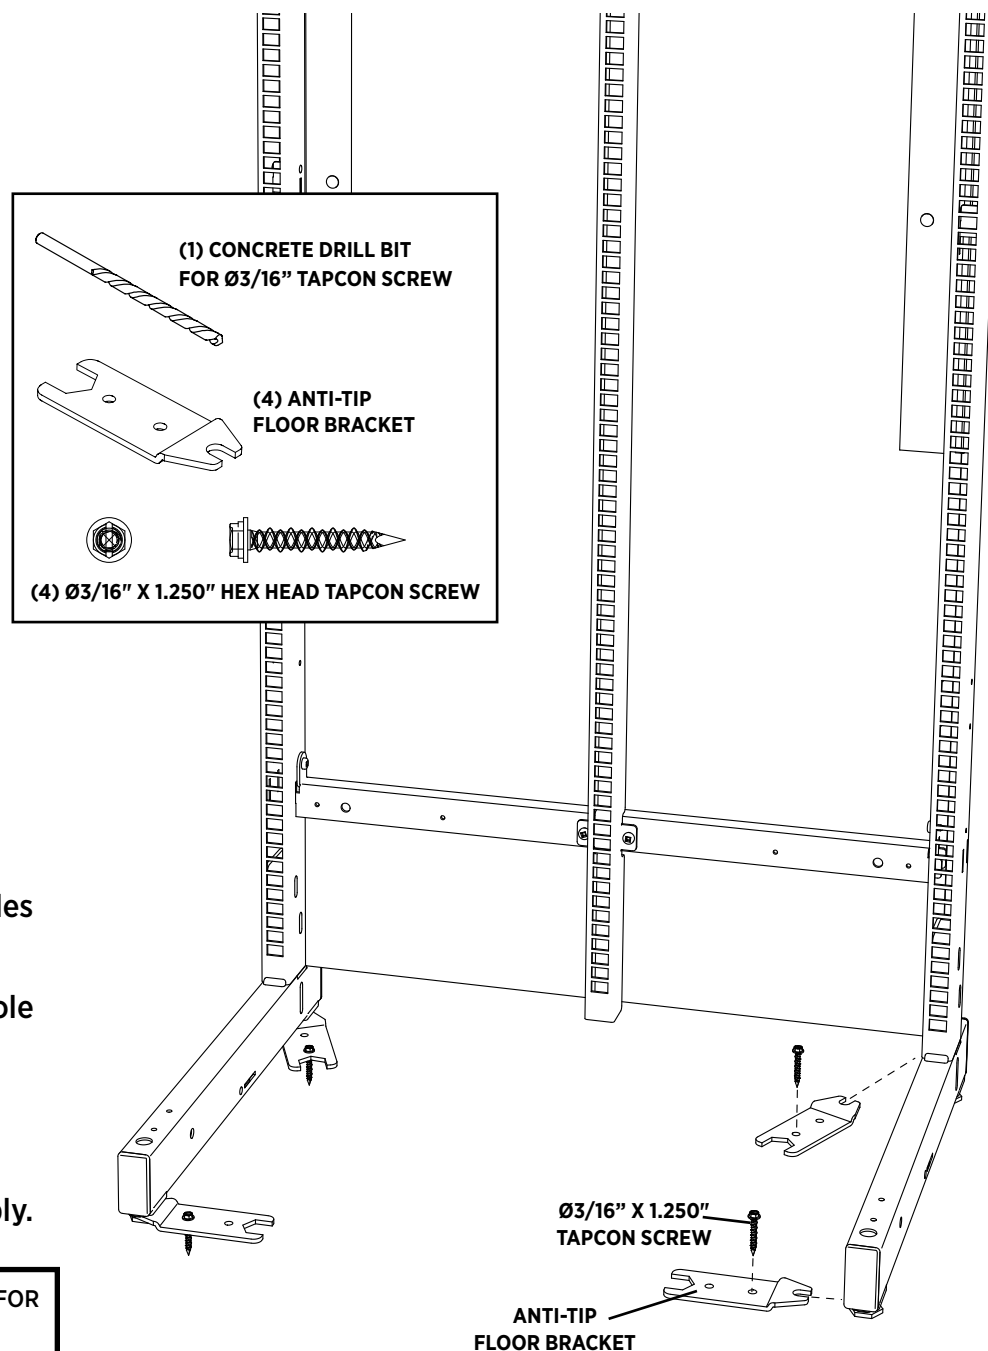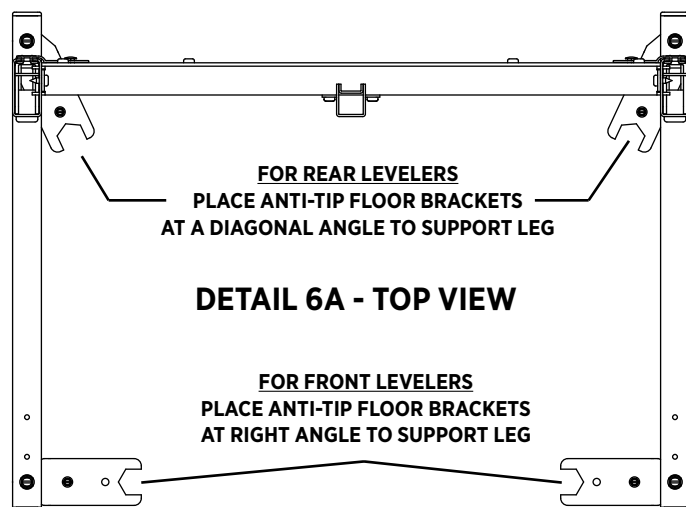

- Use the provided 3/16" concrete drill bit. Place one (1) Anti-Tip Floor Bracket over leveler, using one of the holes as a guide to drill a 1.25" deep hole into concrete floor.
- Install one (1) Ø3/16" x 1.250" Tapcon Screw through hole in bracket and into concrete floor.
- Use a 1/4" hex driver to drive Tapcon Screws into concrete floor.
- Repeat installation over all levelers in structural assembly.

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.


Install Structure - 2.5

STEP 7: Assemble And Install Wall Mount Brackets


For safety and stability, Wall Mount Brackets must be attached to far left and far right vertical leg uprights, and to one of the vertical legs at each location where two vertical legs have been connected together throughout the assembly.

- Measure the distance from vertical leg uprights to the wall, and determine bracket assembly needed to span the gap. Preassemble the required number of bracket sets prior to installation.



ASSEMBLY #1: IF VERTICAL LEG UPRIGHT IS 2.5" - 11" FROM WALL

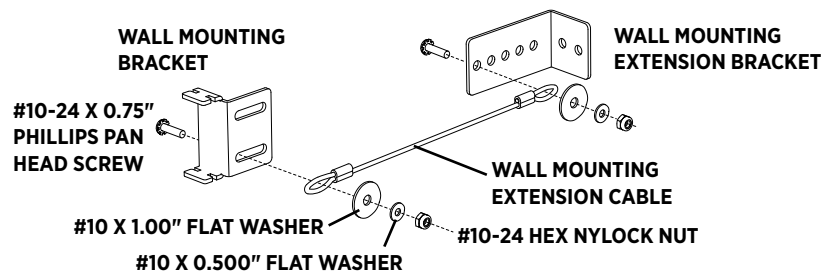

ASSEMBLY #2: IF VERTICAL LEG UPRIGHT IS 1" - 2.5" FROM WALL

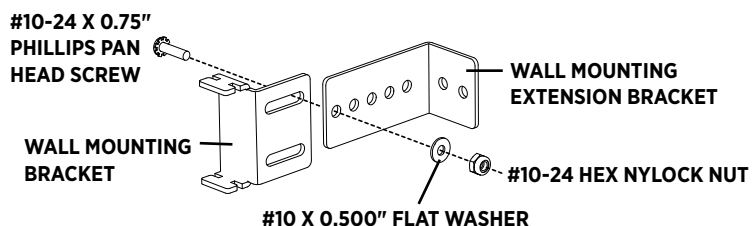

ASSEMBLY #3: IF VERTICAL LEG UPRIGHT IS 0" - 1" FROM WALL

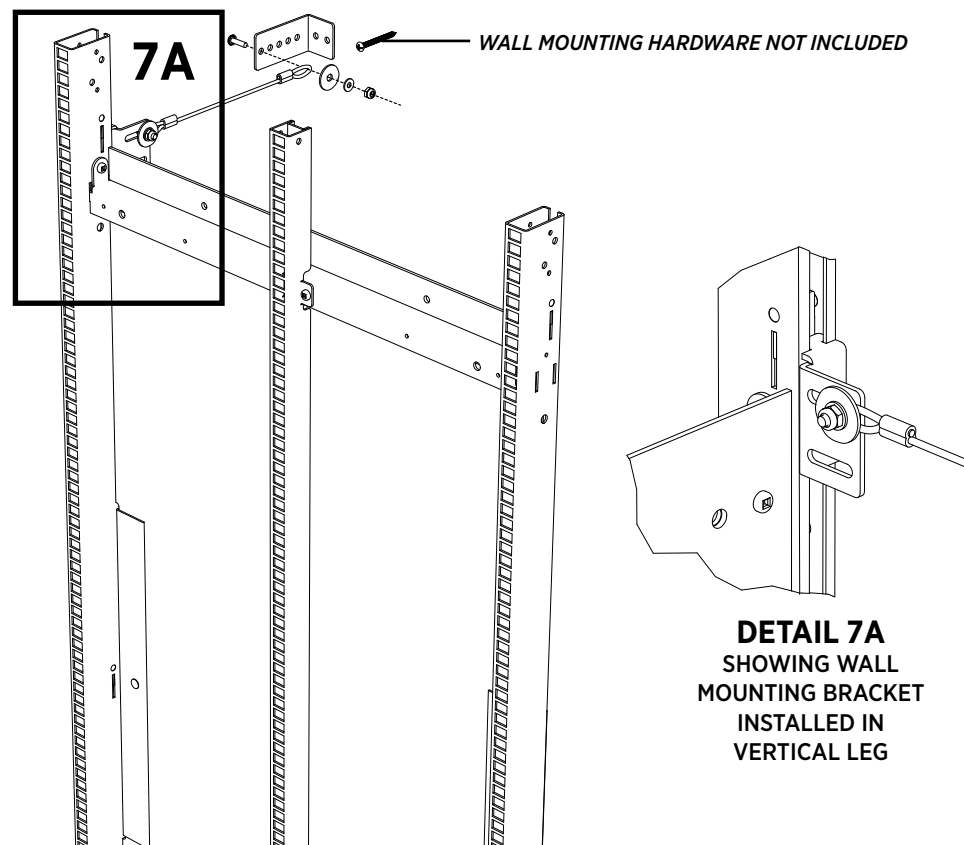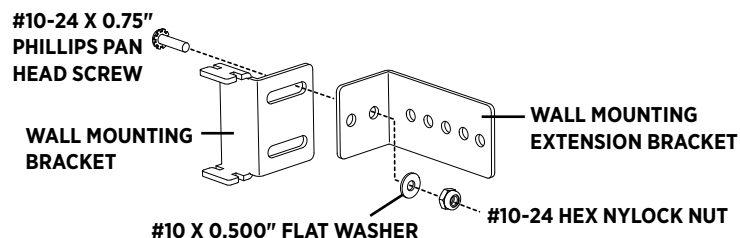

- Slide bracket assemblies into the open channel on back side of far left & far right leg uprights and into one leg of each connected leg pair (**DETAIL 7A**).
- **IMPORTANT:** Wall mounting screws and related hardware are NOT included in this kit. Determine the correct wall mounting hardware that will secure the Wall Mount Bracket assemblies to the existing wall type at installation location to securely support the structural assembly. Install wall mounting hardware as required.


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Structure - 2.6


STEP 8: Install Standard Extensions Onto Low Profile Base Structure Assembly

After Low Profile Base Structure has been secured to the floor and wall, install Standard Extensions.

- Working from one end of the Base Structure, carefully slide bayonets of corresponding-width Standard Extensions into the open top of each leg upright.
- **IMPORTANT:** Make sure that backer panel on the Standard Extension slides in front of the backer panel on Base Structure (**DETAIL 8**).

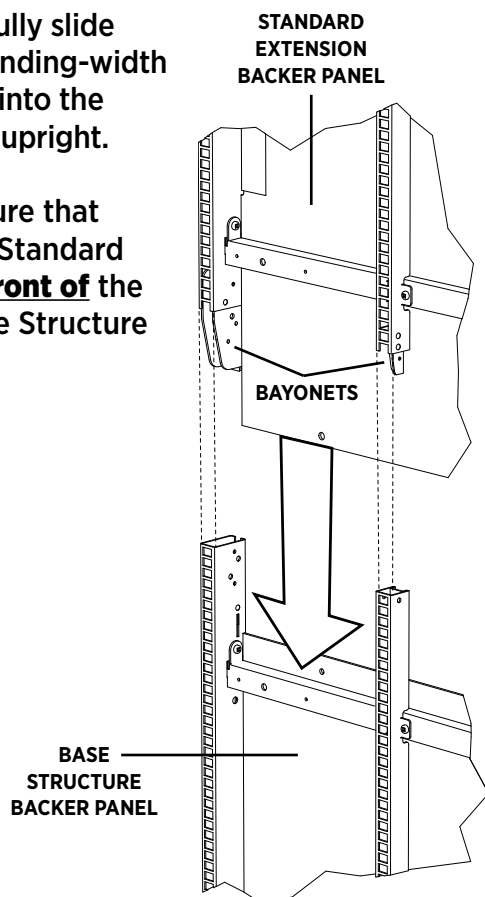

DETAIL 8



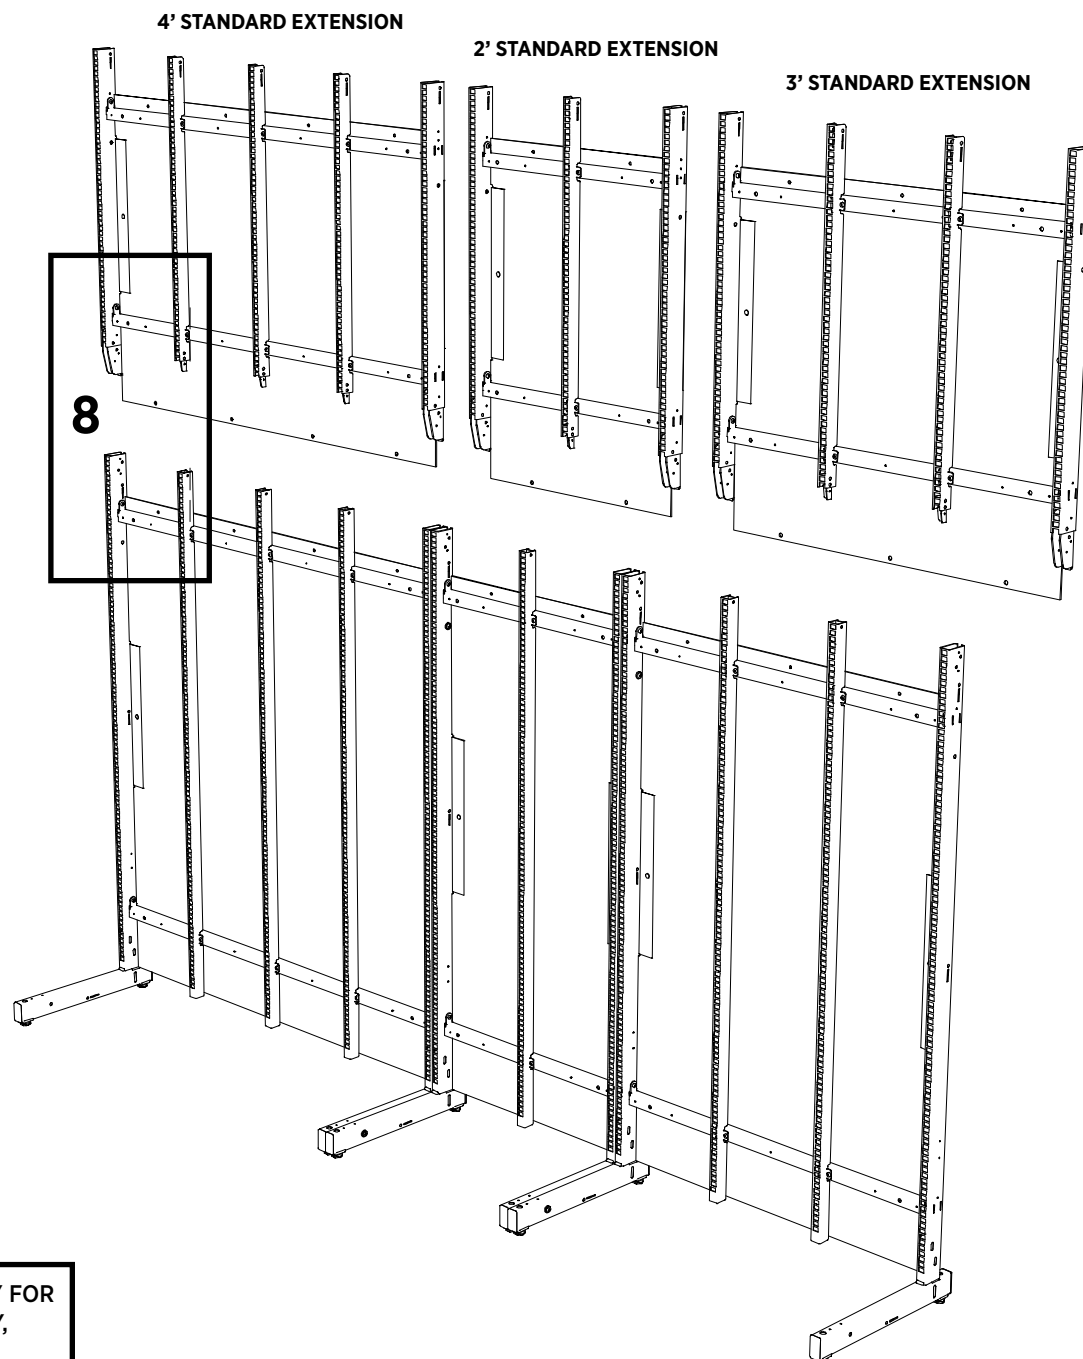


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Structure - 2.7


STEP 9: Install Hardware To Secure Standard Extensions

- Note location of screw holes in sides of slotted leg uprights and slotted splitter uprights. Install two (2) #10 x 0.500" Square Drive TEK Screws into holes in slotted leg uprights, and one (1) #10 x 0.500" Square Drive TEK Screw into hole in slotted splitter upright (**DETAIL 9**).
- Install Plastic Tree Clips through all holes where the Standard Extension backer panel overlaps the Base Structure backer panel (**DETAIL 9**).
- Repeat above steps as required throughout Structural Assembly.

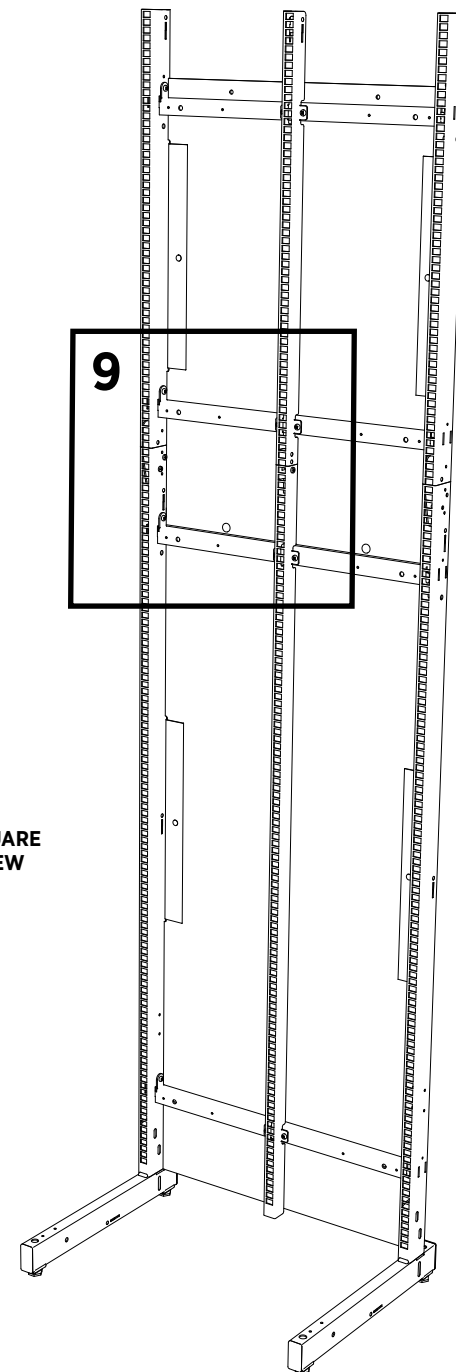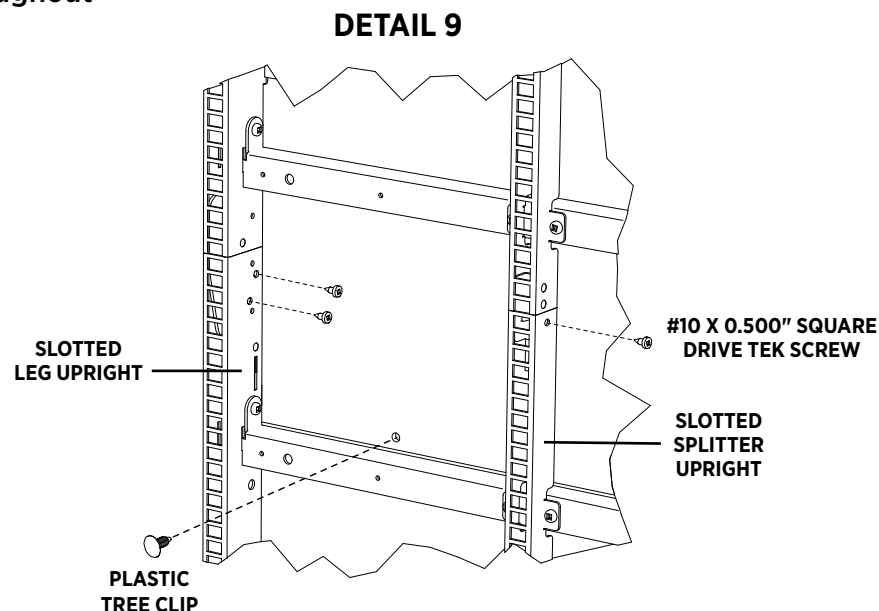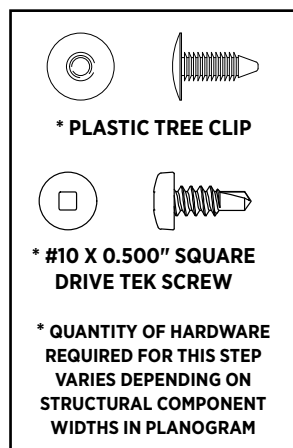

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.


Install Structure - 2.8

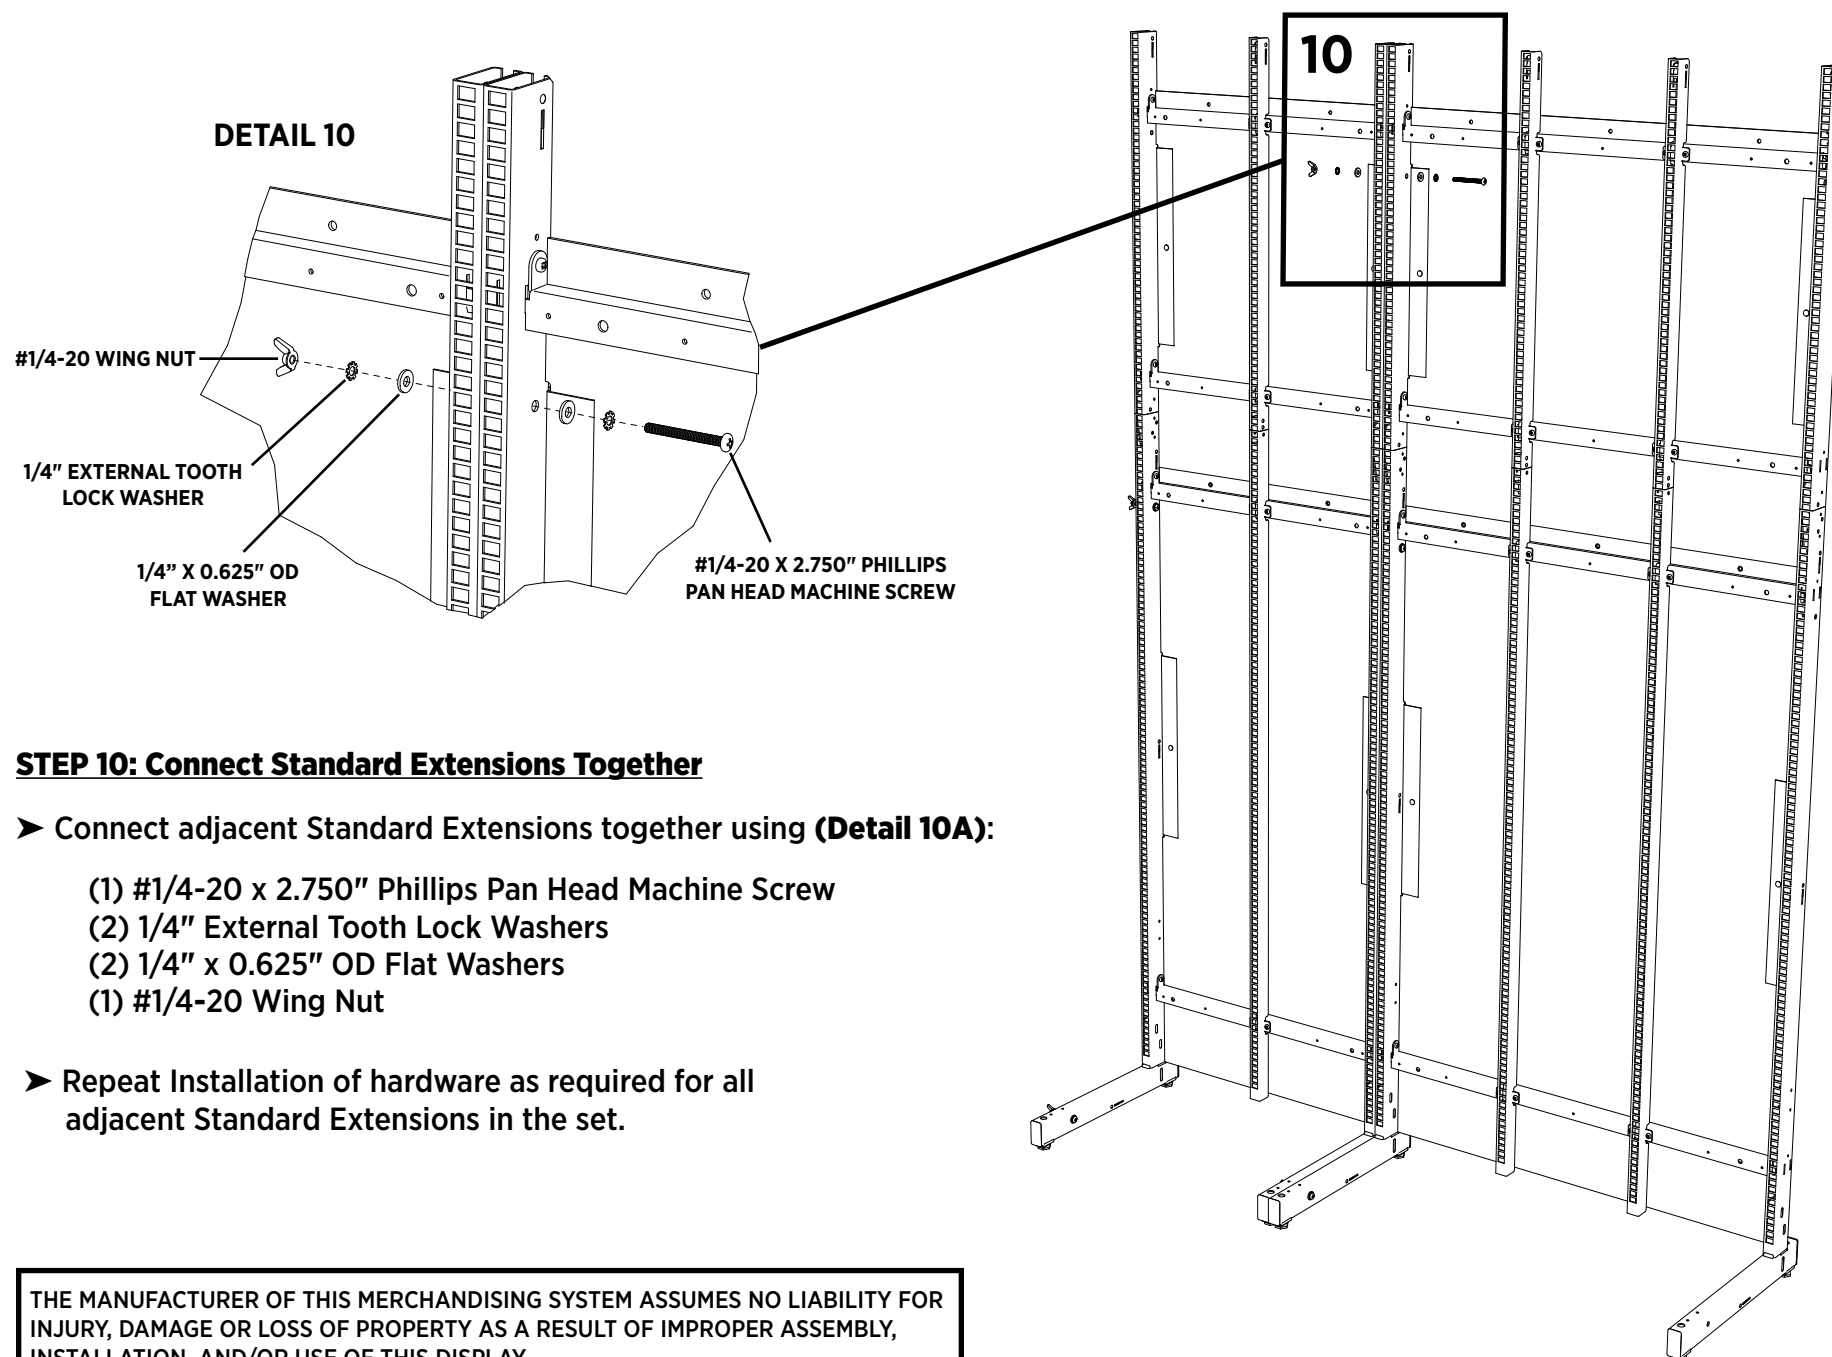



Install Top Sign - 3.1

STEP 11: Top Sign Installation


Identify Top Sign Components and Hardware:

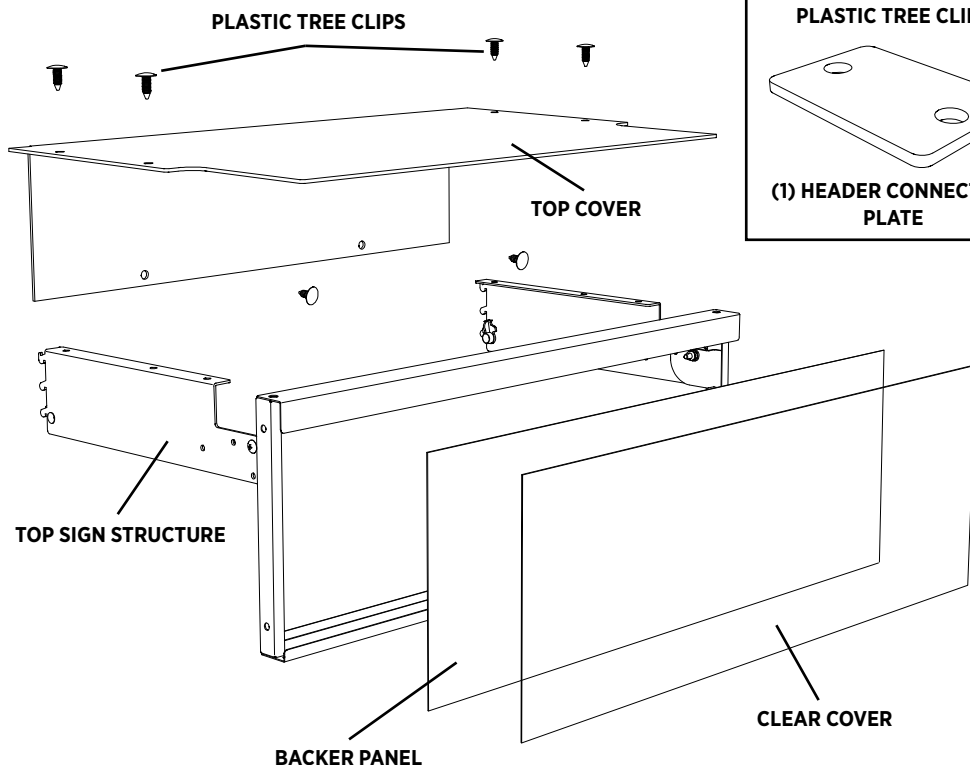


HARDWARE BAG CONTENTS:

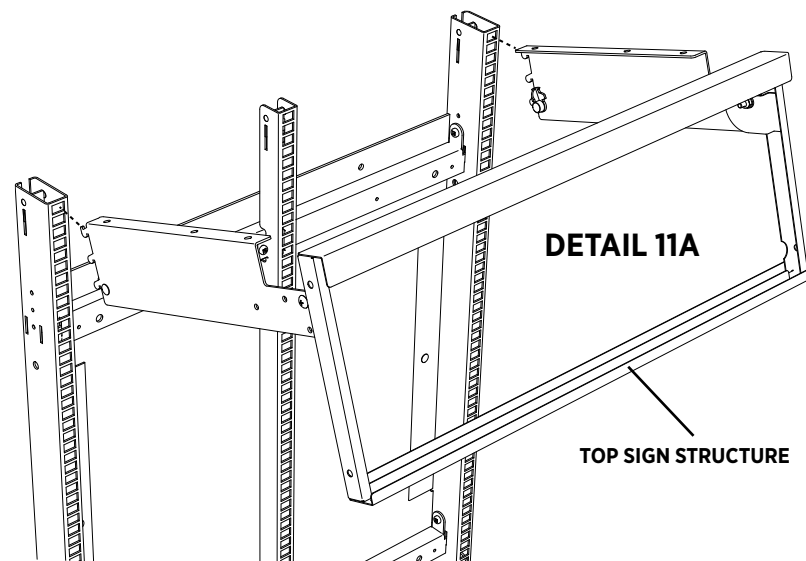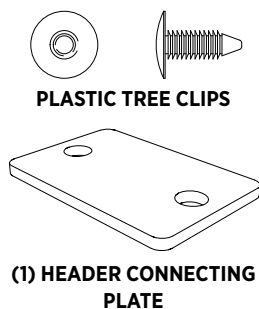

DETAIL 11B

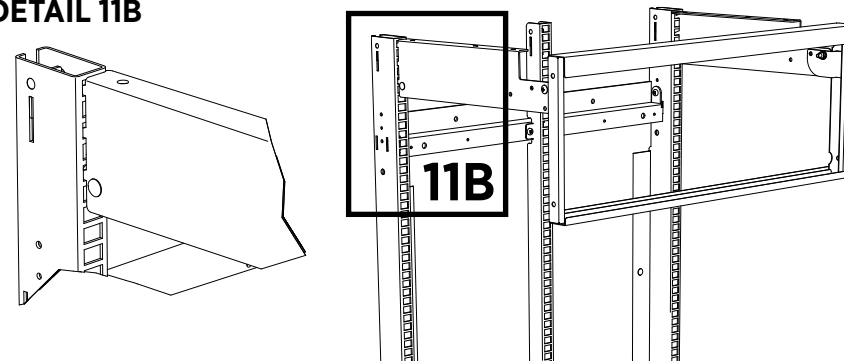

DETAIL 11C

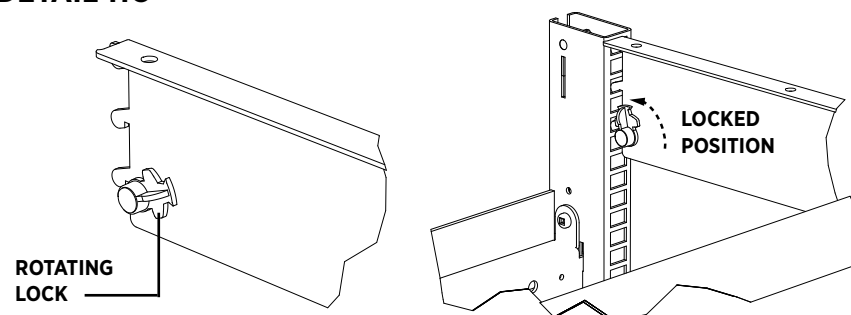

Attach Top Sign Structure to Standard Extension.


- Remove Backer Panel and Clear Cover from Top Sign Frame
- Place top hook on the Top Sign Structure hanging bracket into the top slot of Extension uprights (**DETAIL 11A**). Pivot Top Sign downward and engage remaining hooks in slotted uprights (**DETAIL 11B**) and push downward to secure.
- Lock Top Sign Structure into place by engaging both rotating locks into slots in vertical uprights (**DETAIL 11C**).

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

TOP SIGN INSTALLATION CONTINUED ON NEXT PAGE ...


Install Top Sign - Top Cover - 3.2

DETAIL 12

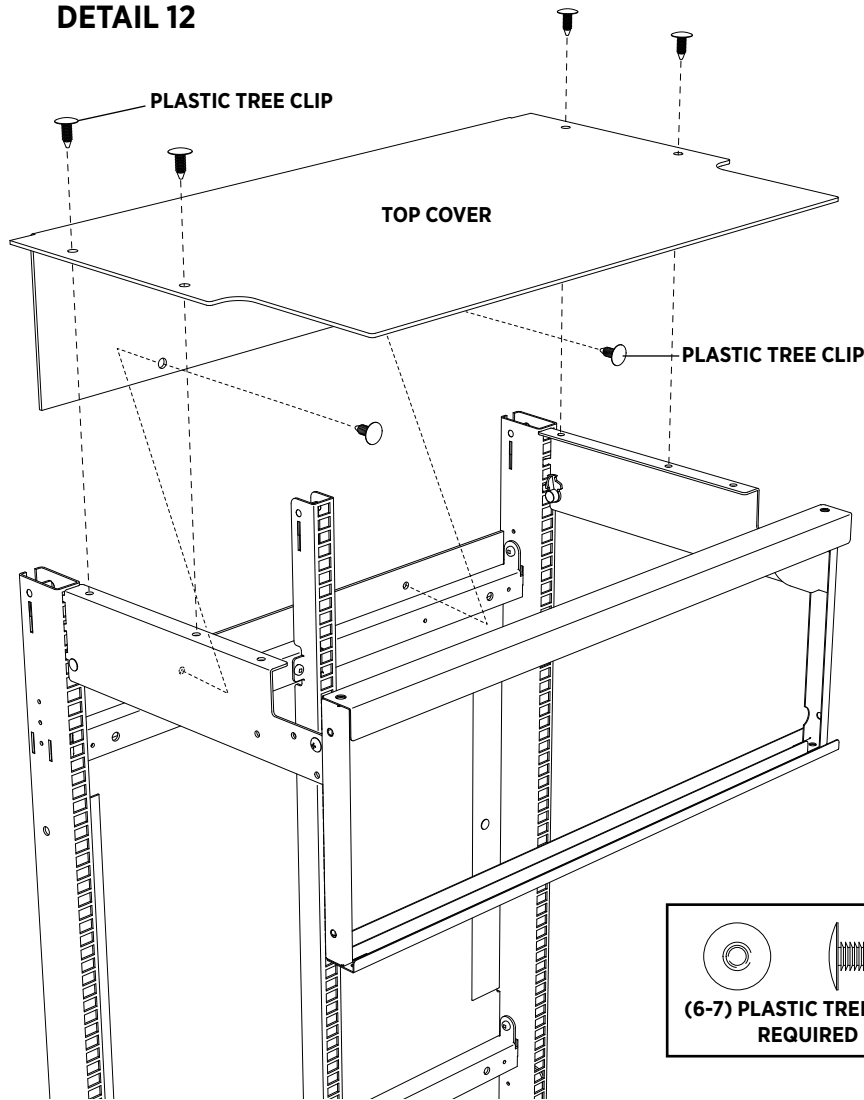

STEP 12: Install Top Cover Onto Each Top Sign Structure

- Align Top Cover over the Top Sign and lower into place. Back panel of Top Cover must go in front of the backer panel on Standard Extension (DETAIL 12).
- Align holes in Top Cover over holes in Top Sign hanging brackets. Install four (4) Plastic Tree Clips.
- Align holes in overlapping back panels and install one (1) Plastic Tree Clip through each overlapping hole location to secure.

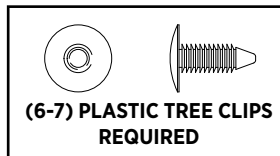




THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Top Sign - 3.3

STEP 13: Connect Top Signs Together

Connect Adjacent Top Sign Structures Together For Added Stability.

- Install header connecting plate between adjacent Top Signs. Align holes in connecting plate over front pair of holes on Top Sign brackets, as shown, and install two tree clips to secure. **(DETAIL 13).**
- Repeat as required throughout fixture assembly.

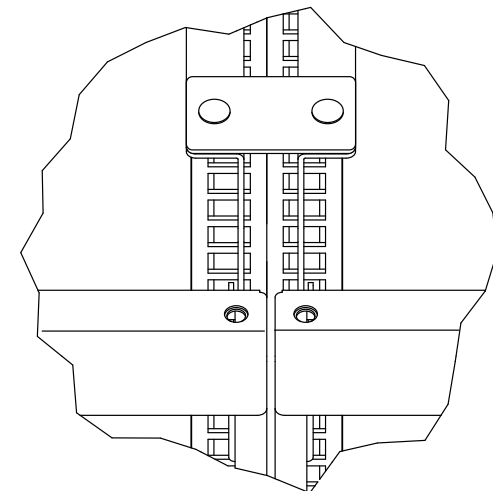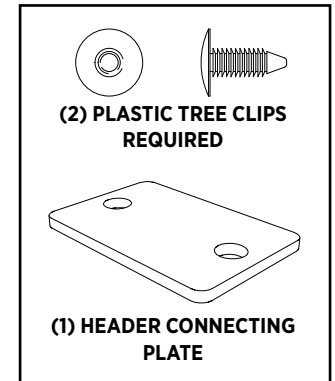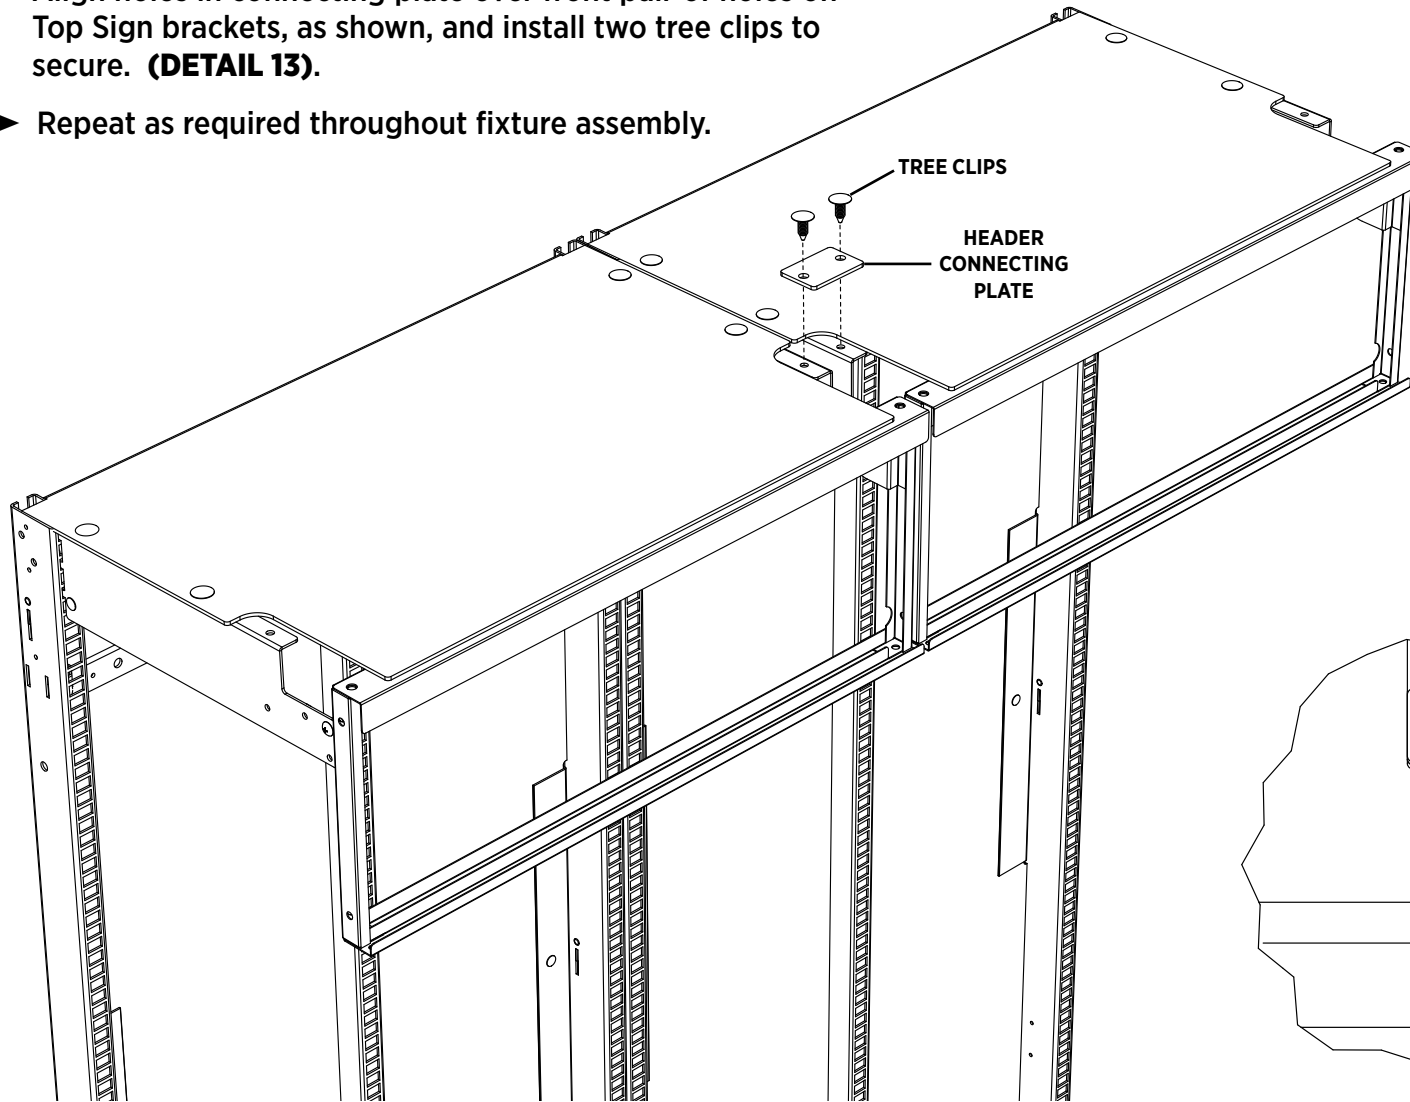


DETAIL 12
HARDWARE INSTALLED

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.


Install Illuminated Top Sign Panel - 3.4

STEP 14 (OPTIONAL ADD-ON): Illuminated Top Sign Panel Kit


Unpack and identify Illuminated Top Sign Panel components.

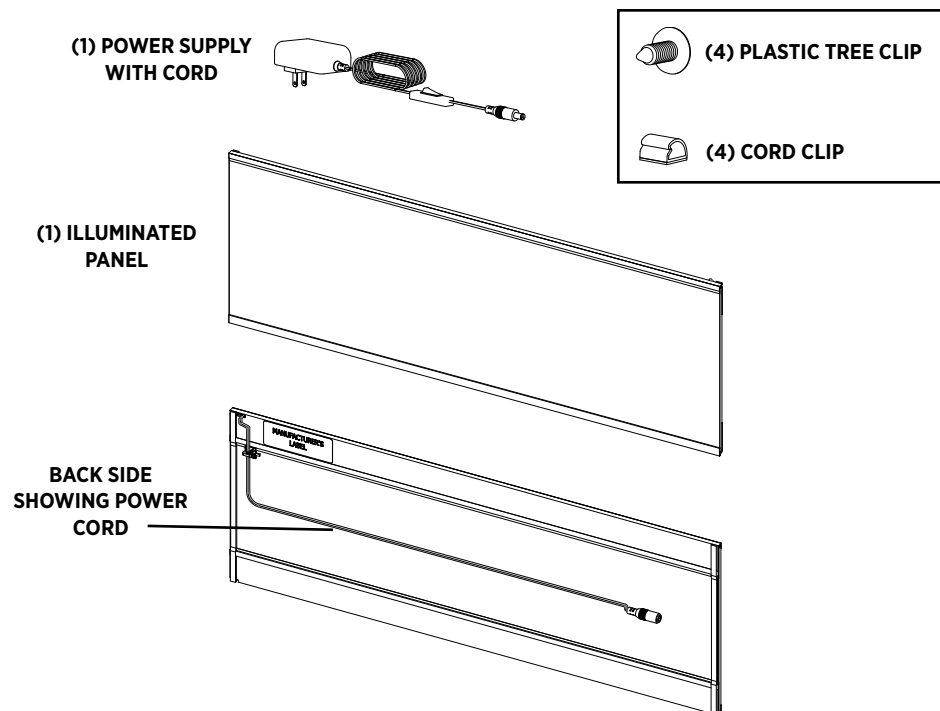

STEP 15: Install Illuminated Top Sign Panel

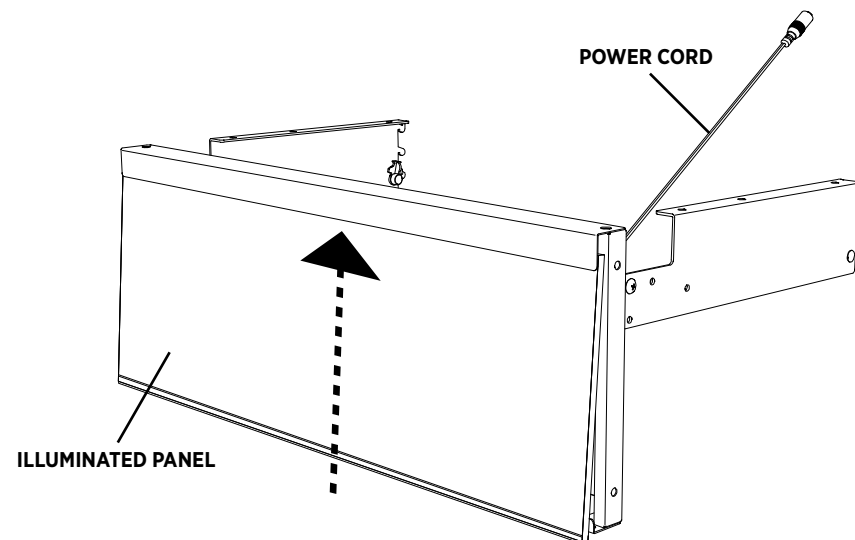


Feed power cord through front of sign frame, then lift and drop Illuminated Panel into Top Sign frame (**DETAIL 15**).

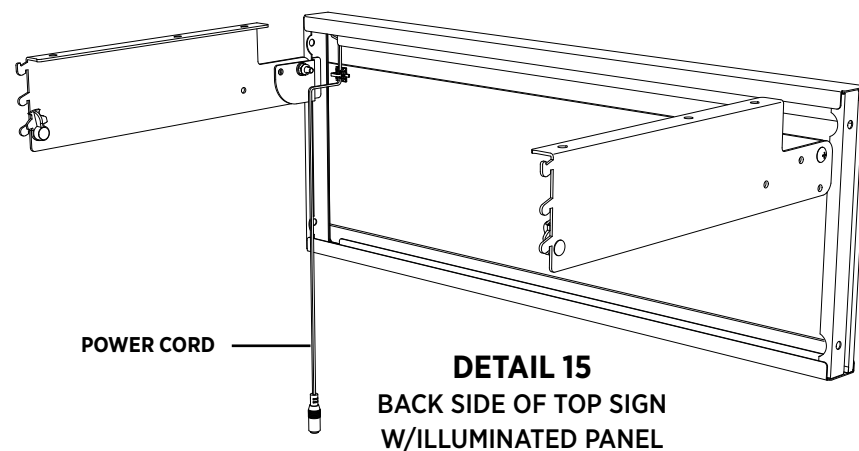

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.


Install Illuminated Top Sign Panel and Top Sign Side Channels - 3.5

STEP 16: Install Cord Clips And Top Sign Side Channels

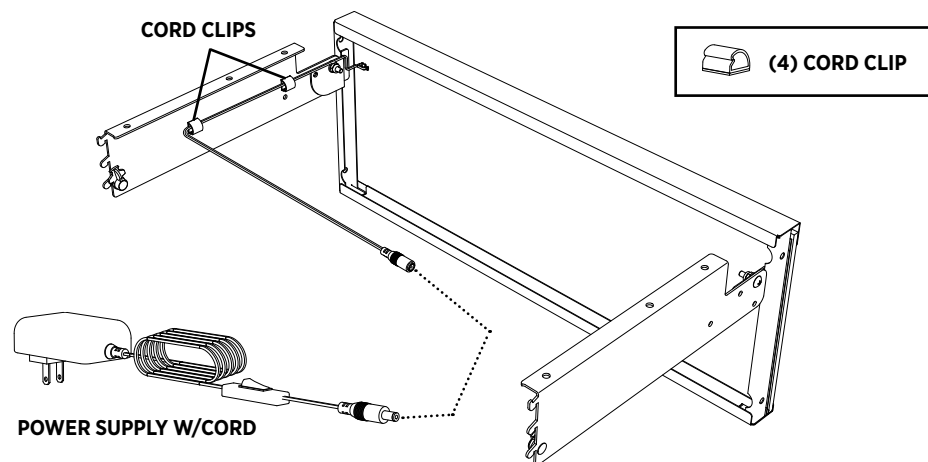


Use supplied Cord Clips to discipline cord on inside face of Top Sign Mounting Bracket. Attach cord to power supply, plug into nearest outlet.

STEP 17: Attach Top Sign Side Channels to Top Sign Frame

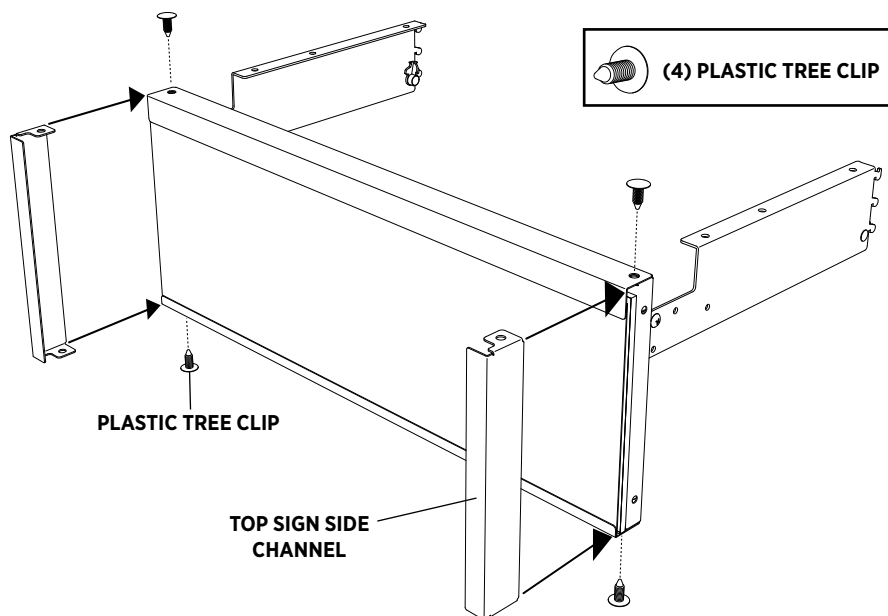

Attach two (2) Top Sign Side Channels to Top Sign Frame. Align holes in side channels over holes in Top Sign Frame and install (4) tree clips.

STEP 18: Installation of Panels and POS Graphic

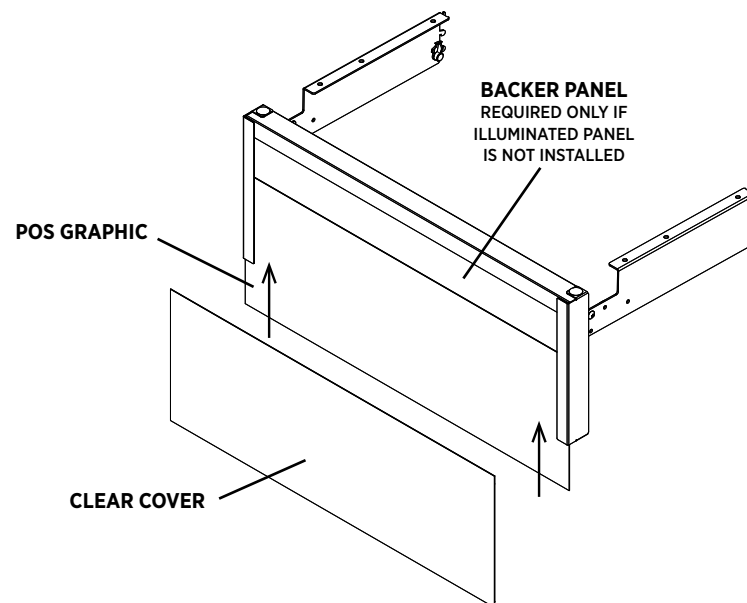

For non-illuminated sets only (when illuminated panel is not used):

- Insert backer panel (removed in Step 11) through bottom opening between side channels of Top Sign Frame. Slide panel upward until it can be dropped into bottom channel of frame.

For non-illuminated and illuminated sets:

- Peel protective film from clear cover and install through bottom opening between side channels of Top Sign Frame. Slide panel upward until it can be dropped into bottom channel of frame.
- Install POS graphic in same manner.
- Peel protective covering from both sides of clear cover and install in same manner.

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Component Installation Guide - 4.1




IMPORTANT NOTE:

SHELVES AND OPTIONAL COMPONENTS MUST BE INSTALLED IN THE CORRECT ORDER.
REFER TO INSTALLATION GUIDE BELOW BEFORE PROCEEDING TO NEXT STEPS.

OPTION 1:


Storage Cabinet Installation*
Proceed to Step 19 (page 18).

*If required, Storage Cabinets must be installed before optional Side Panels and shelves.

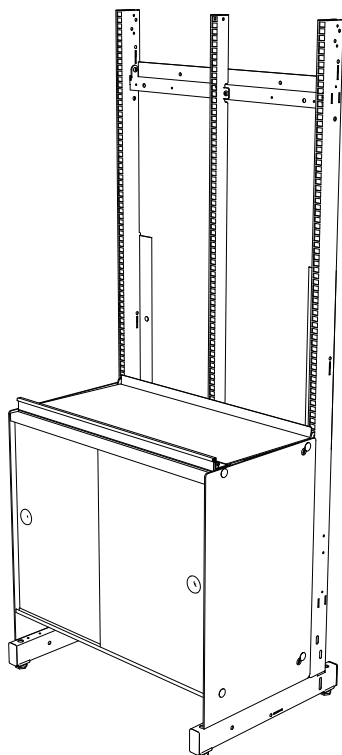

OPTION 2:



Shelf Installation - Proceed to Step 26
(page 23).

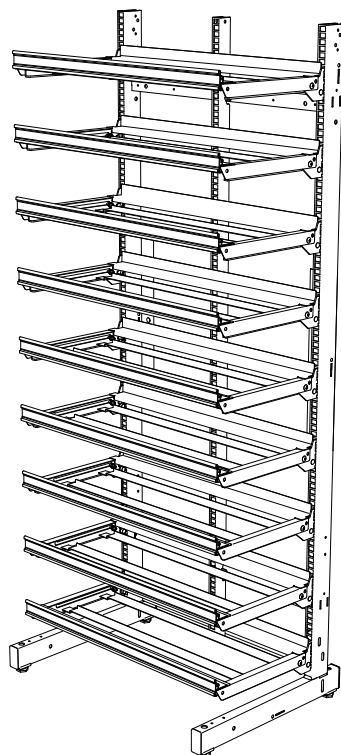

OPTION 3:

Side Panel Installation - Proceed to Step 30 (page 26).


Can be used with optional Storage Cabinets, but Storage Cabinets must be installed first.

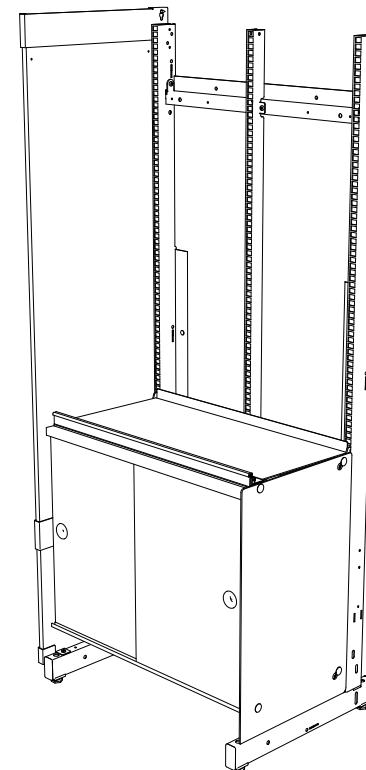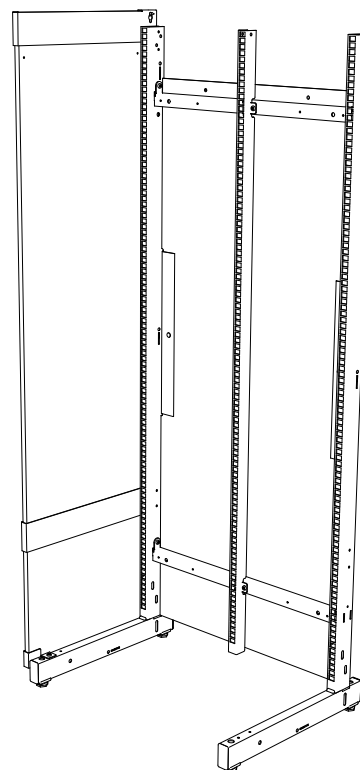

Storage Cabinet Installation - 5.1

STEP 19 (OPTIONAL ADD-ON): Storage Cabinet Components

Unpack and identify Storage Cabinet Kit components.

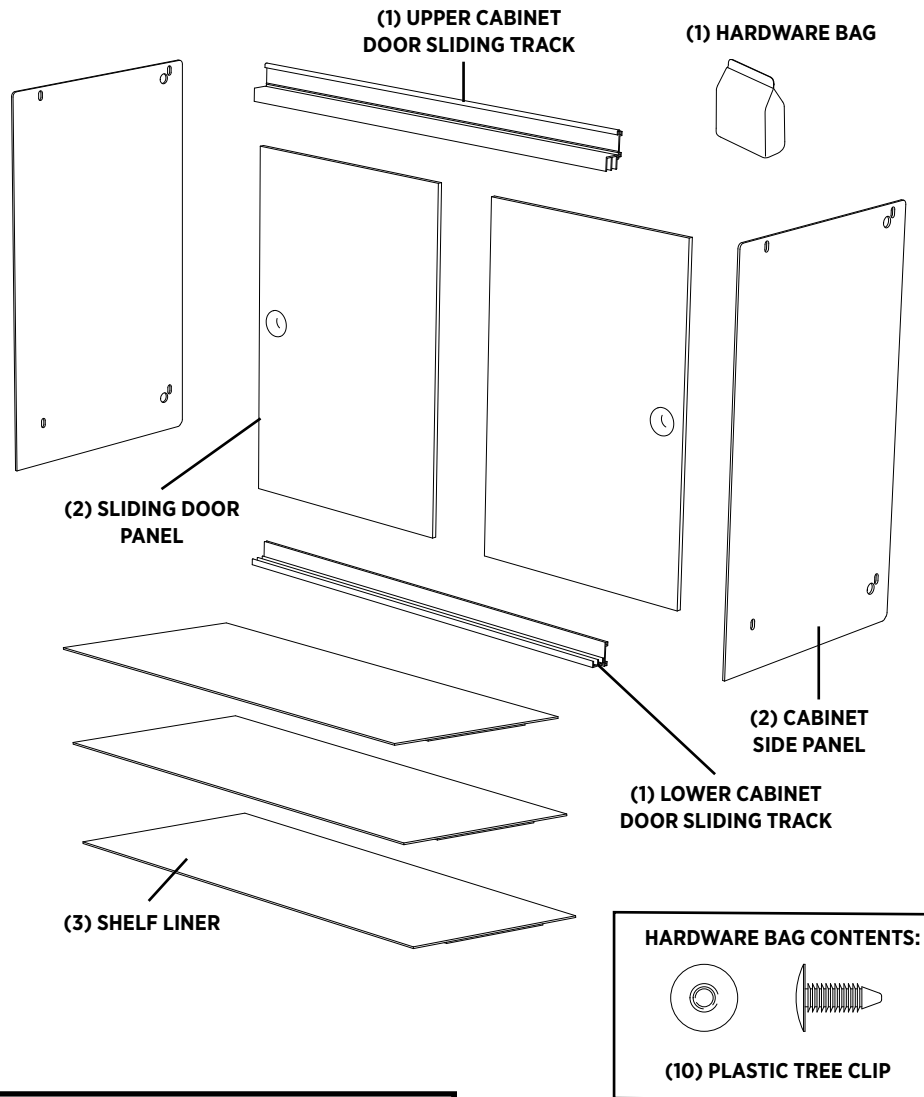


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

STEP 20: Adjacent Storage Cabinet Installation - Planning Guide



If Side Panel Kit will NOT be installed: Work from left to right and complete the installation of one storage cabinet at a time before proceeding to installation of adjacent cabinets. Install cabinet side panels at outboard ends of adjacent cabinet assemblies.


Only one (1) cabinet side panel is required between adjacent storage cabinets. LOCK SLIDING SHELF MECHANISMS AT ALL LOCATIONS WHERE SIDE PANELS WILL NOT BE ATTACHED.

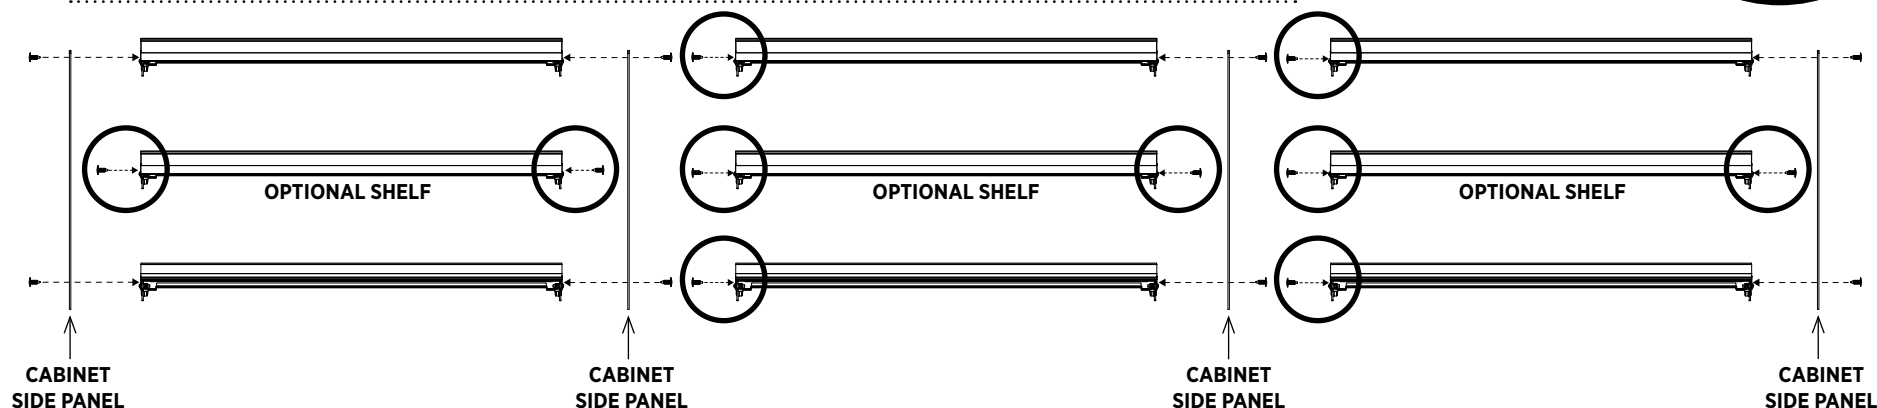

If Side Panel Kit WILL be installed: Work from left to right and complete the installation of one storage cabinet at a time, before proceeding to installation of adjacent cabinets.

Only one (1) cabinet side panel is required between adjacent storage cabinets. LOCK SLIDING SHELF MECHANISMS AT ALL LOCATIONS WHERE SIDE PANELS WILL NOT BE ATTACHED.



Do not install cabinet side panels in outboard locations on fixture where optional side panels will be installed -- INSTALL TREE CLIPS ONLY, as indicated in diagram below.

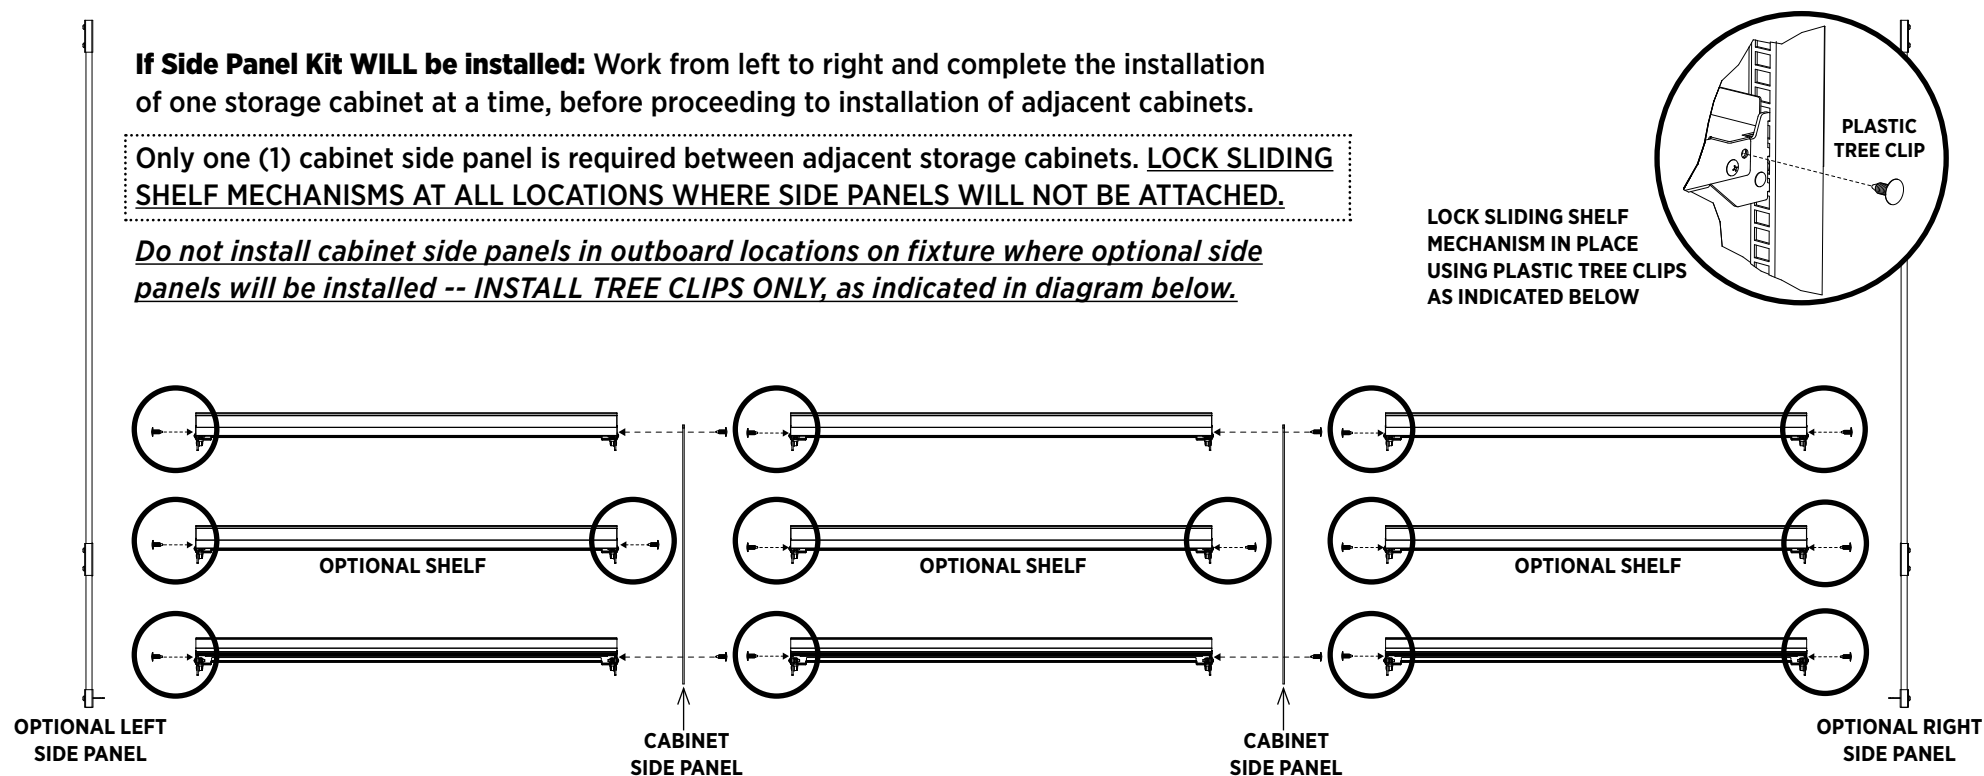

Storage Cabinet Installation - 5.2

STEP 21: Install Shelves For Cabinet Storage Kit

- Work from left to right on fixture where storage cabinets will be installed. Complete assembly of one storage cabinet at a time before proceeding.
- Install one shelf into lowest position in slotted uprights. This shelf is the bottom shelf of the cabinet storage assembly (**DETAIL 21A**).
- Measure 21.50" up from the top of horizontal leg to corresponding slots in uprights and install top shelf of cabinet storage assembly (**DETAIL 21B**).
- Remember to engage rotating shelf locks on each shelf.
- An optional shelf can be installed between top and bottom shelves if needed. Before installing optional shelf, sliding shelf mechanism must be locked by inserting two (2) plastic tree clips into holes at back of shelf bracket, as shown (**DETAIL 21C and 21D**).

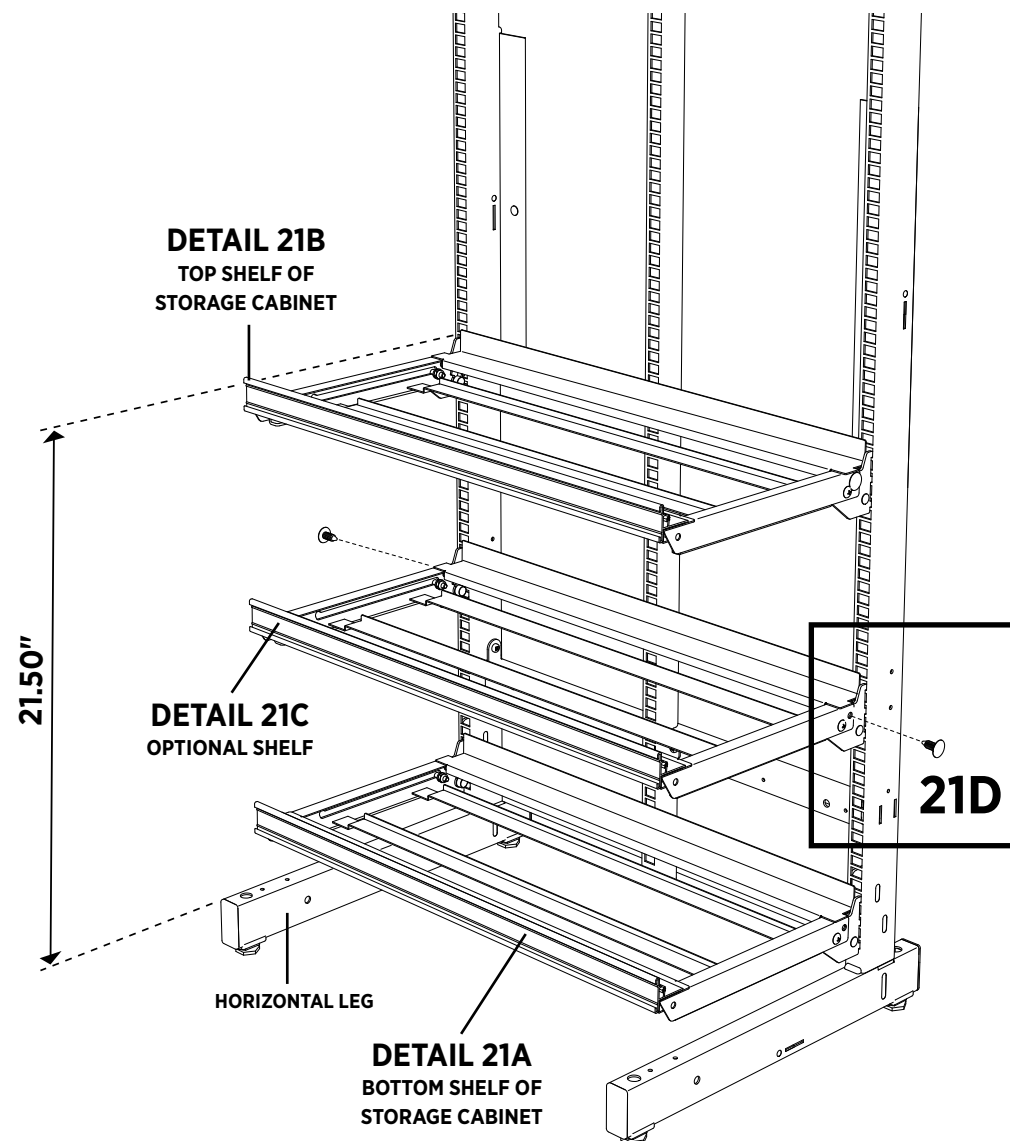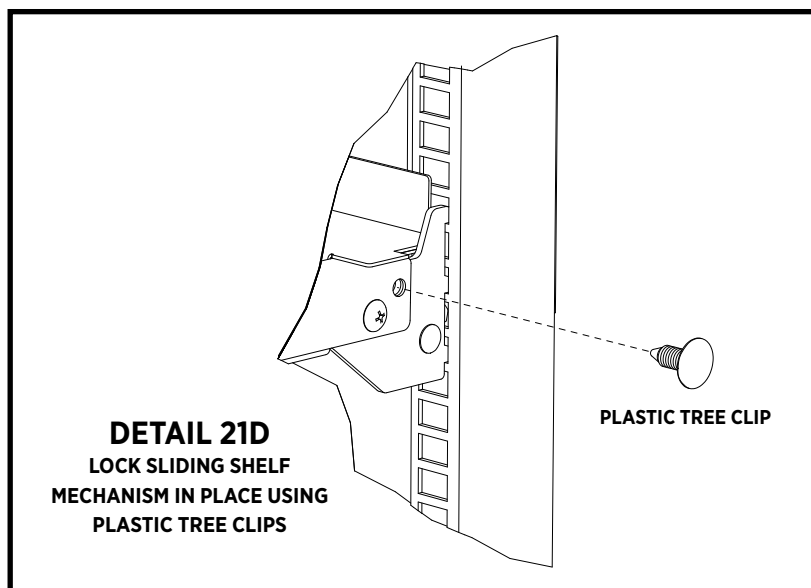


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Storage Cabinet Installation - 5.3

STEP 22: Install Shelf Liners On All Storage Cabinet Shelves


- Remove backing from adhesive strips on underside of Shelf Liner and align over sliding tray on shelf.
- Press Shelf Liner into place on shelf tray so adhesive strips make contact and adhere to side metal flanges.

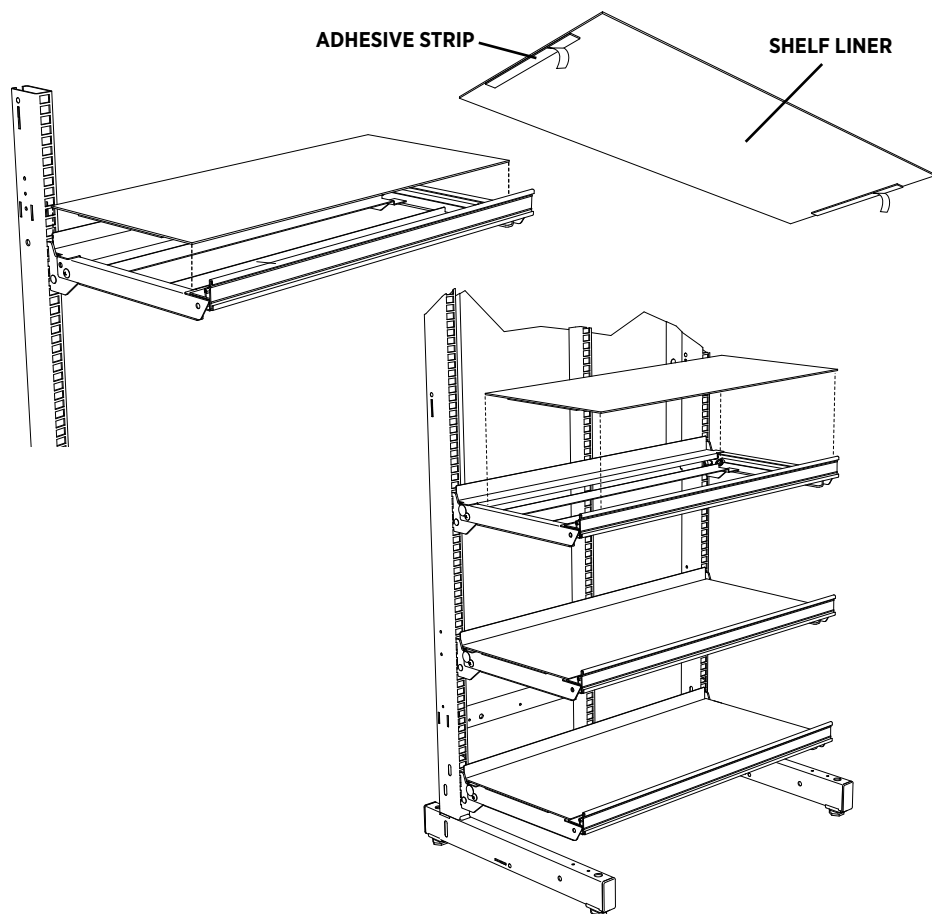


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

STEP 23: Install Sliding Tracks For Cabinet Storage Doors


- Slide Upper Cabinet Door Sliding Track into channel strip of upper shelf, as shown (**DETAIL 23A**).
- Slide Lower Cabinet Door Sliding Track into channel strip of bottom shelf, as shown (**DETAIL 23B**).

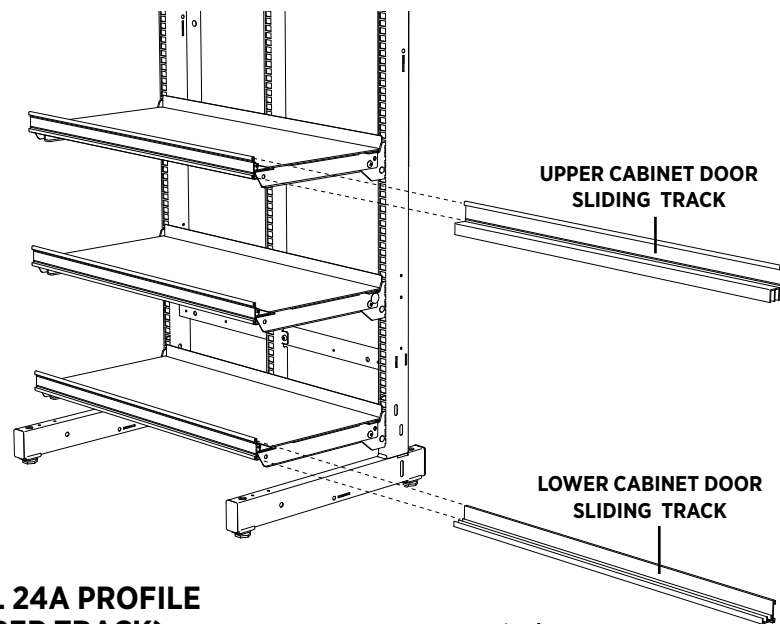

DETAIL 24A PROFILE
(UPPER TRACK)

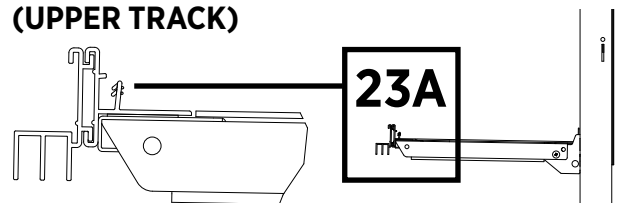


DETAIL 24B PROFILE
(LOWER TRACK)

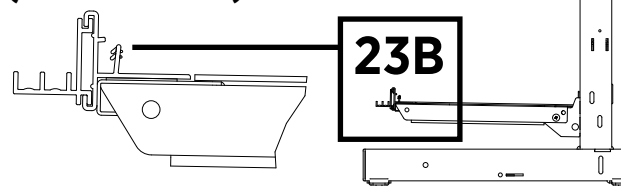

Storage Cabinet Installation - 5.4

STEP 24: Install Cabinet Storage Side Panels


- Align holes in each Cabinet Side Panel with holes on sides of top and bottom shelves and install four (4) plastic tree clips to secure.
- Adjacent Storage Cabinets will share a single/common Cabinet Side Panel.
- ****Do NOT install cabinet side panels at outboard ends of fixture assembly if side panel kit will be installed. Install plastic tree clips to lock shelves first.**

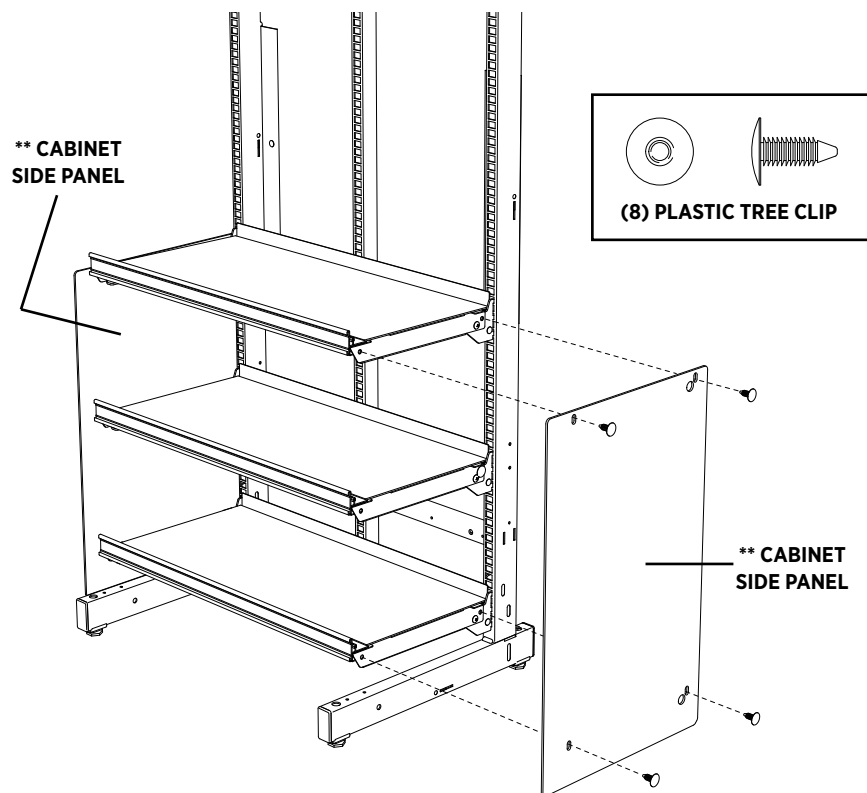

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.


STEP 25: Install Sliding Doors

- Lift and drop left-side door into rear channel of upper and lower sliding tracks. Lift and drop right-side door into front channel of upper and lower sliding tracks (**DETAIL 25**).
- Repeat STEPS 21-25 until all Storage Cabinets are installed.

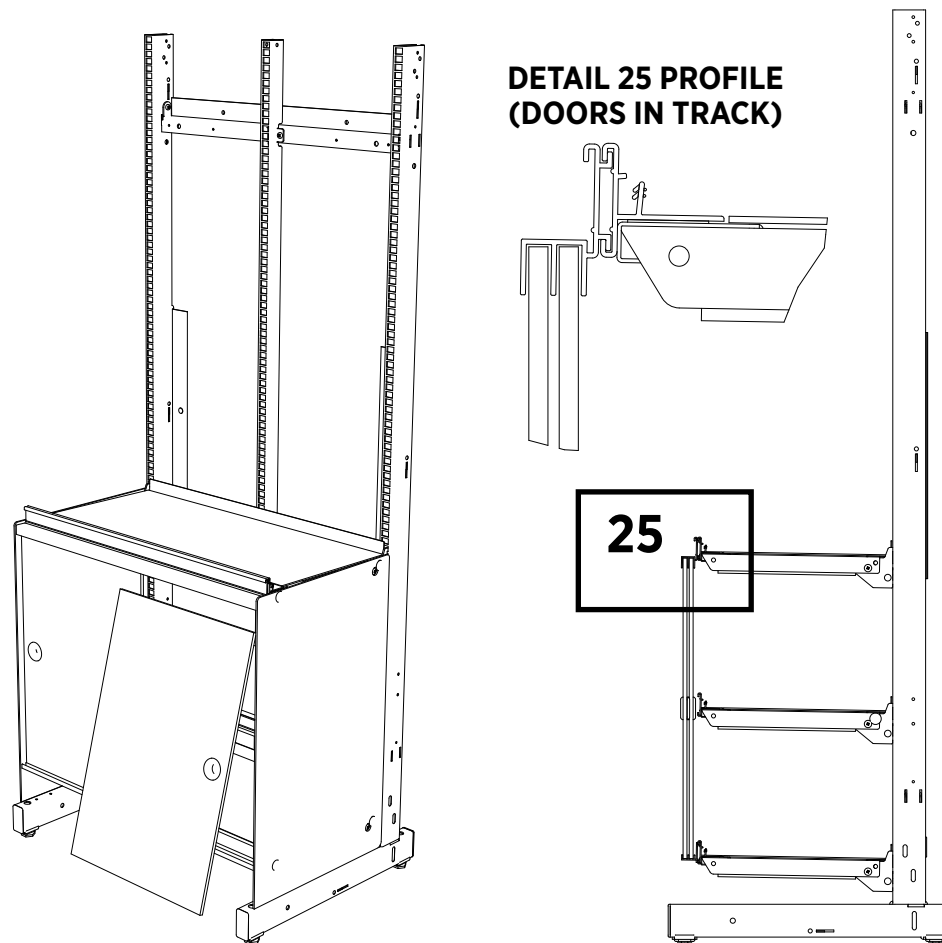

Shelf Installation - 6.1


STEP 26: Install Shelves On Fixture

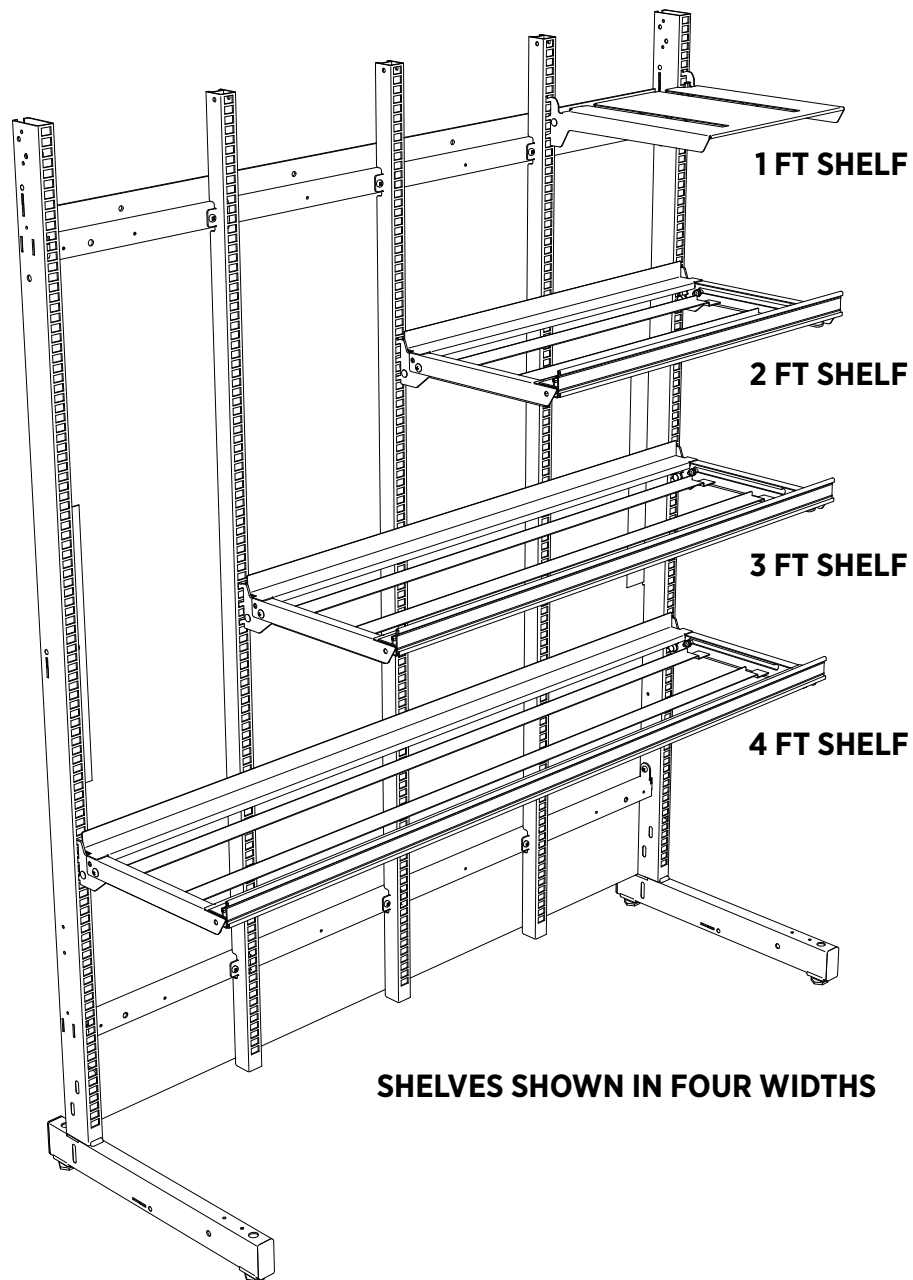

IMPORTANT NOTE:

REFER TO PLANOGRAM FOR SHELF LAYOUT ON FIXTURE SET AND ORGANIZE SHELVES PRIOR TO INSTALLATION.

ONCE INSTALLED, SHELVES CAN BE PULLED OUT AND ANGLED DOWNWARD FOR PUSHER INSTALLATION AND EASE OF PRODUCT LOADING.

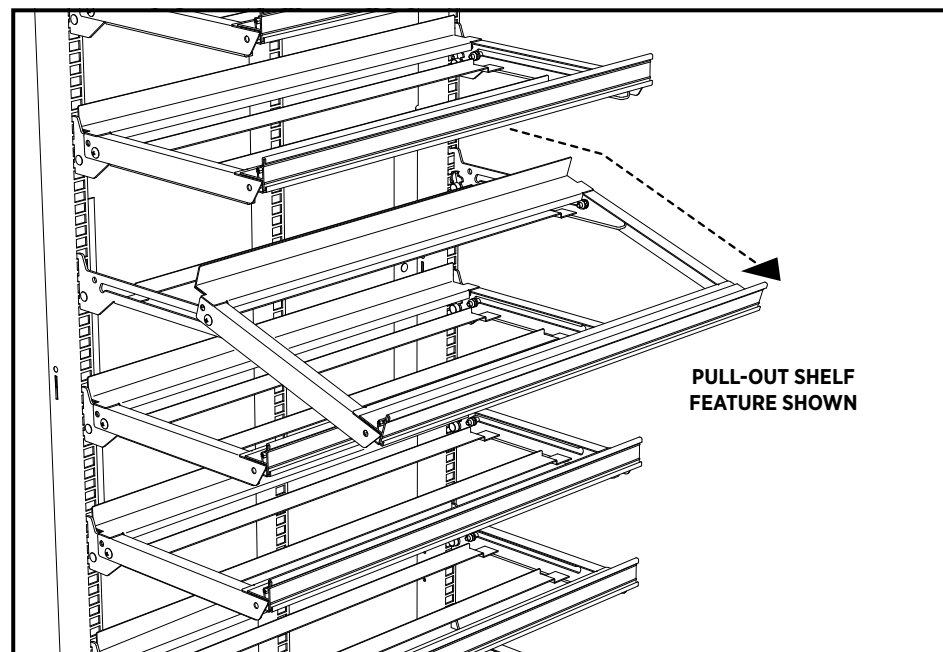


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Shelf Installation - 6.2

STEP 27 (continued): Install Shelves On Fixture

When Storage Cabinets are not present:

- Start shelf installation at the left end of the set.
- Install first shelf into bottom slots of Base Structure Uprights.
- Lock shelf in place by rotating shelf locks into slotted uprights **(DETAIL 27A).**
- Use magnetic shelf positioning brackets to assist with the accurate spacing shelves at 6-inch centers in slotted uprights **(DETAIL 27B).**
- Install remaining shelves in same manner, per planogram, locking each shelf using rotating shelf locks.

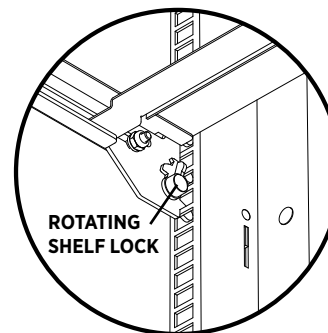

DETAIL 27A


When Storage Cabinets are present:

- Start shelf installation at the left end of the set.
- Use magnetic shelf positioning brackets to assist with the accurate spacing shelves at 6-inch centers in slotted uprights above top shelf of Storage Cabinet assembly **(DETAIL 27B).**
- Install remaining shelves in same manner, per planogram, locking each shelf using rotation shelf locks.

DETAIL 27B

USE MAGNETIC SHELF
POSITIONING BRACKET
WHEN 6-INCH VERTICAL
SHELF SPACING IS REQUIRED

MAGNETIC
SHELF
POSITIONING
BRACKET

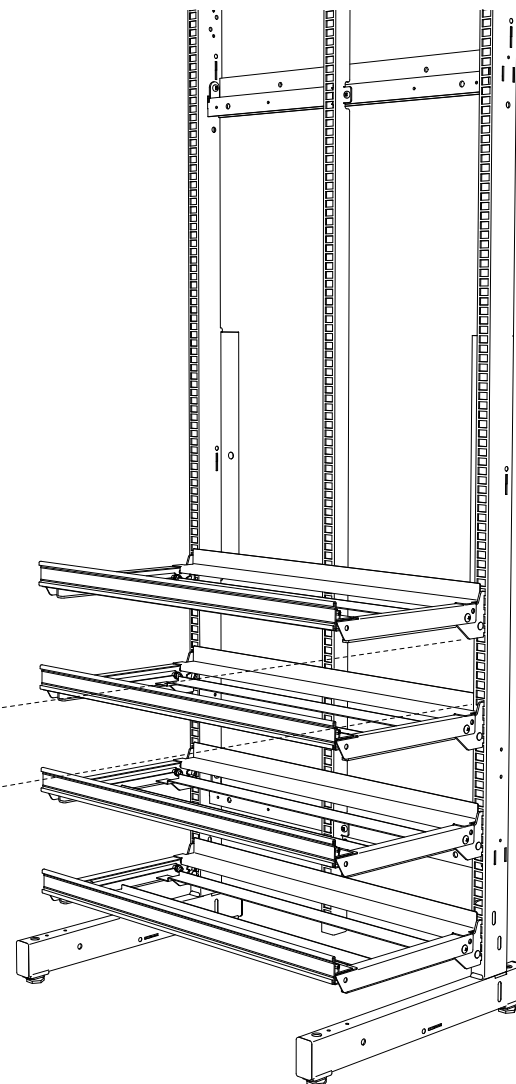


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Shelf Installation - 6.3

STEP 28 (OPTIONAL ADD-ON): Install Storage Shelf Behind Top Sign

If desired, an additional shelf with a preinstalled shelf liner can be installed behind the Top Sign to create a concealed storage area.

- Pivot Top Sign frame upward to open position (**DETAIL 28**). Align and install shelf so it will be flush with the bottom edge of Top Sign frame when frame is in closed position.
- Lock shelf in place in slotted uprights by rotating both locks into slots.
- Repeat optional shelf installation as required.

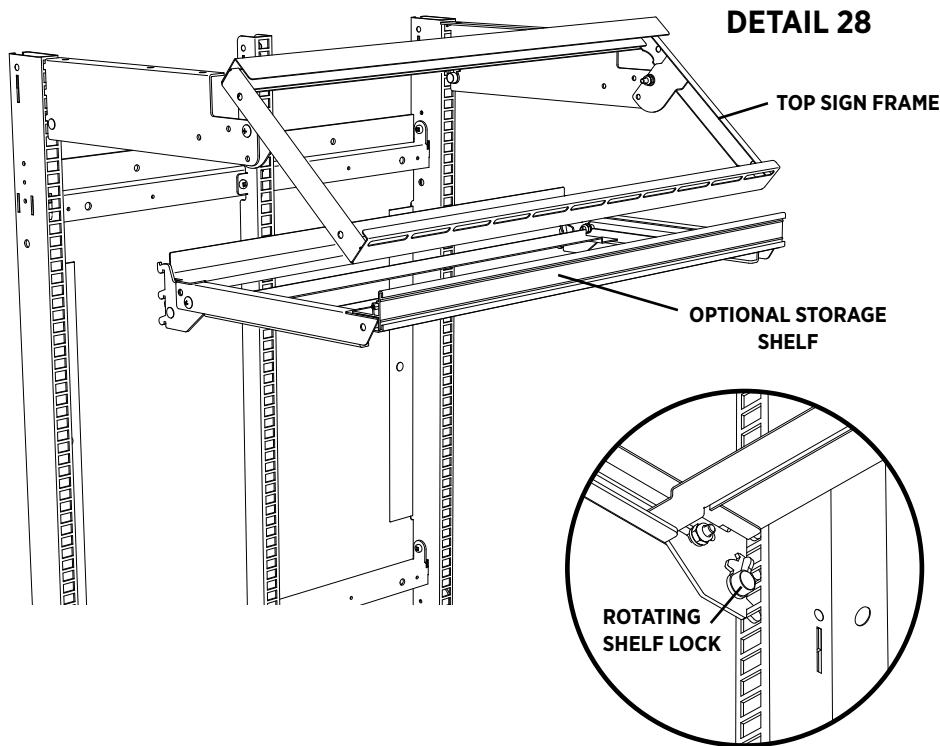


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

STEP 29: (OPTIONAL ADD-ON) - Install Shelf Liner On Shelf

If optional shelf liners are required per your planogram, they must be attached to shelves prior to pusher installation.


- Remove backing from adhesive strips on underside of Shelf Liner, and align over sliding tray on shelf.
- Press Shelf Liner into place on shelf tray so adhesive strips make contact and adhere to side metal flanges.

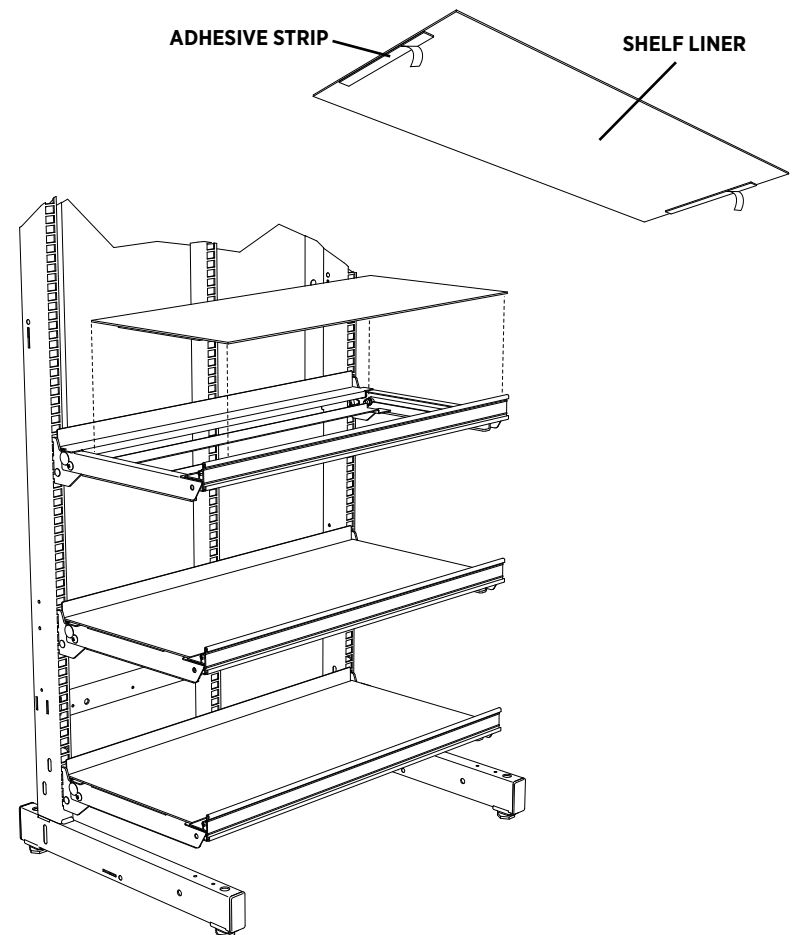

Side Panel Kit Installation - 7.1

STEP 30 (OPTIONAL ADD-ON): Side Panel Kit - Standard Profile

Unpack and identify Side Panel Kit components.

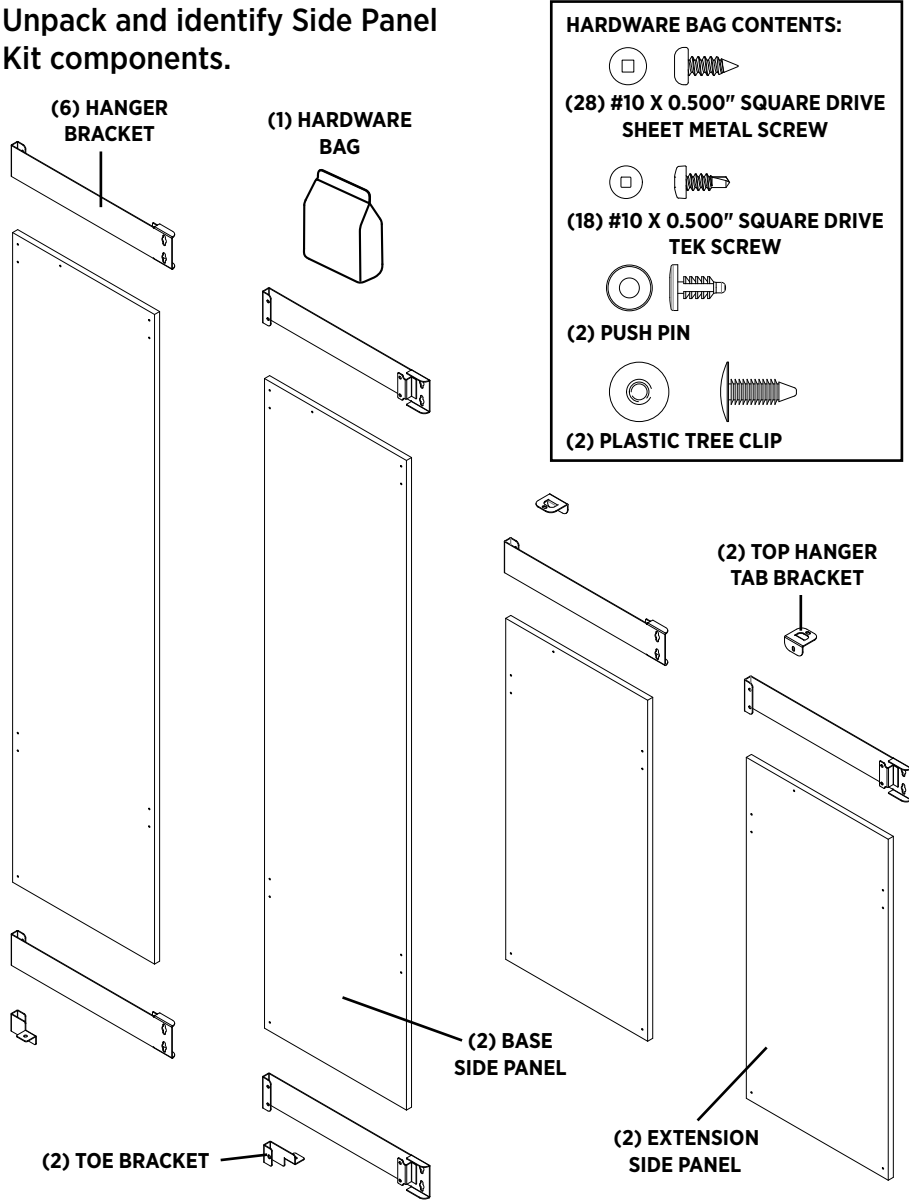


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.


STEP 31: Extension Side Panel Kit Assembly

Locate pre-drilled holes on each Extension Panel, and attach one (1) hanger bracket to each panel using four (4) #10 x 0.500" Square Drive Sheet Metal Screws. **(DETAIL 31A).**

Attach one (1) Top Hanger Tab Bracket to each panel using one (1) #10 x 0.500" Square Drive Sheet Metal Screw **(DETAIL 31B).**

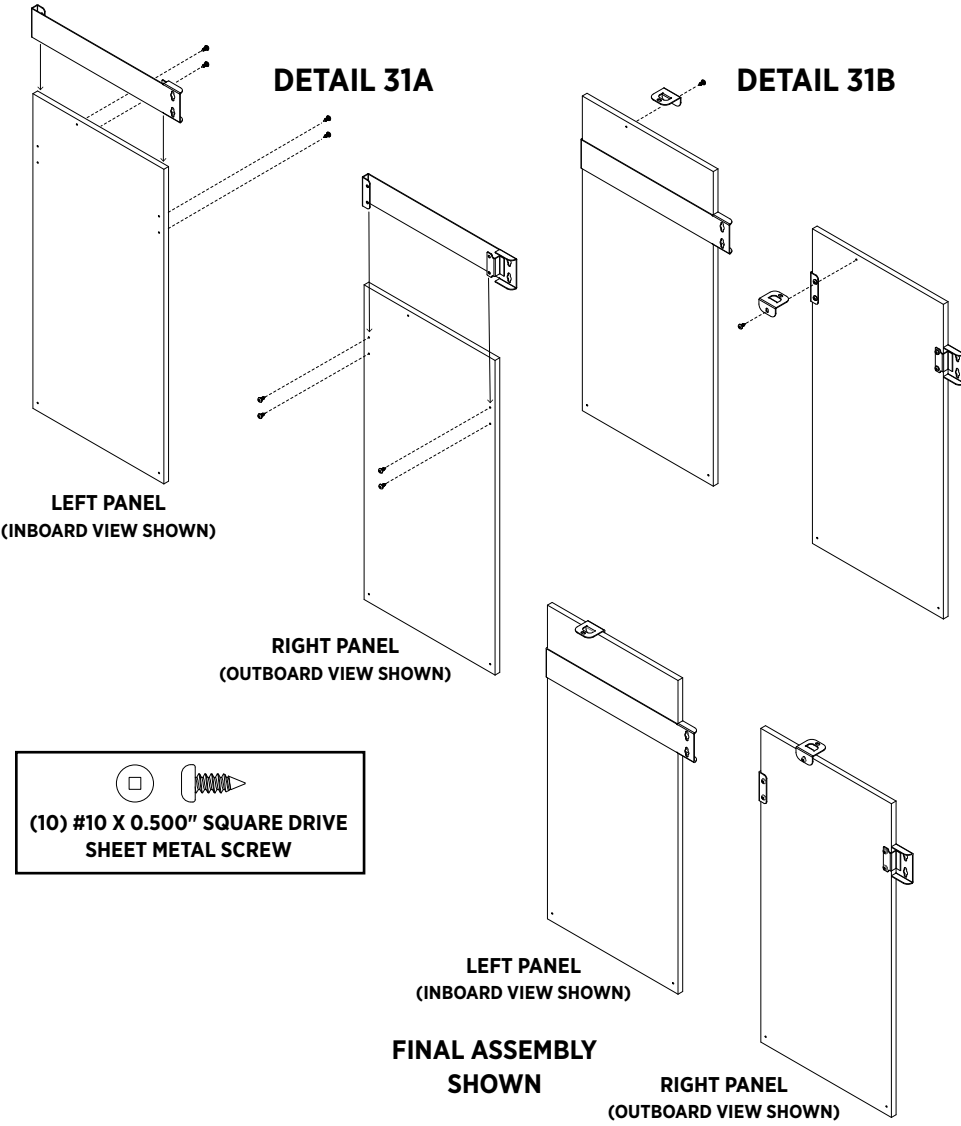





Side Panel Kit Installation - 7.2

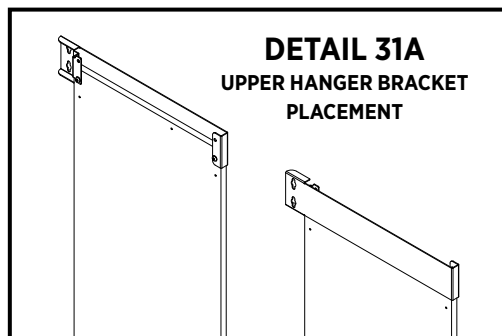

STEP 32: Base Side Panel Kit Assembly


Locate pre-drilled holes on each Base Side Panel. Attach two (2) hanger brackets to each Base Side Panel using four (4) #10 x 0.500" Square Drive Sheet Metal Screws to attach each lower hanger bracket. Refer to diagram at left for correct placement of upper hanger brackets (**DETAIL 32A**), and attach each bracket using two (2) #10 x 0.500" Square Drive Sheet Metal Screws.

Attach one (1) Toe Bracket to each panel, in the direction shown for left and right assemblies. Secure each using one (1) #10 x 0.500" Square Drive Sheet Metal Screw (**DETAIL 32B**).

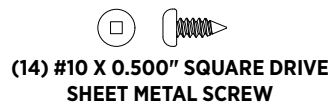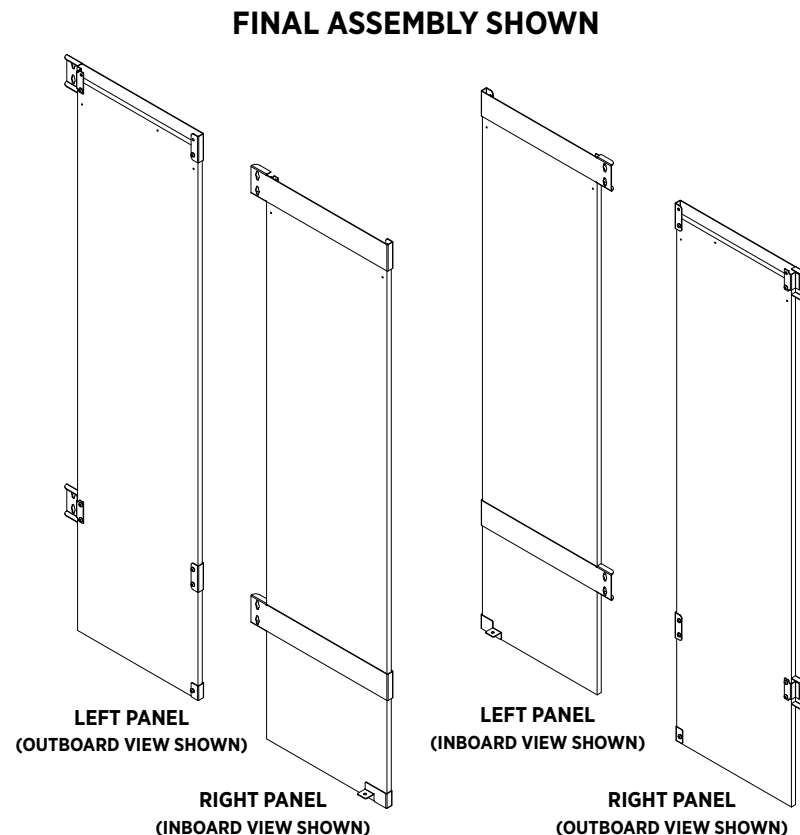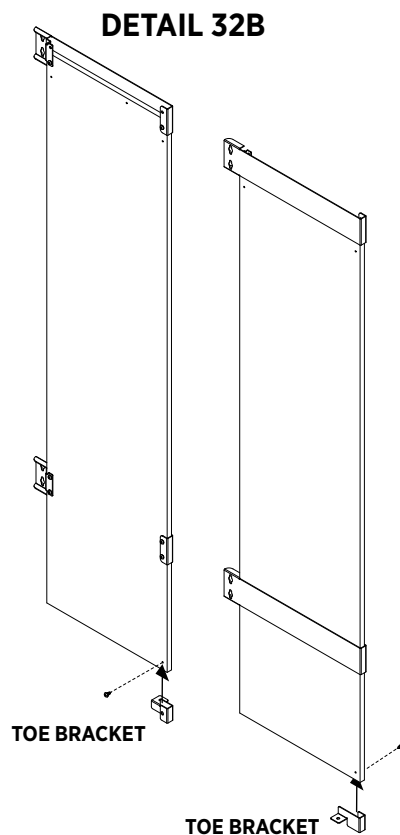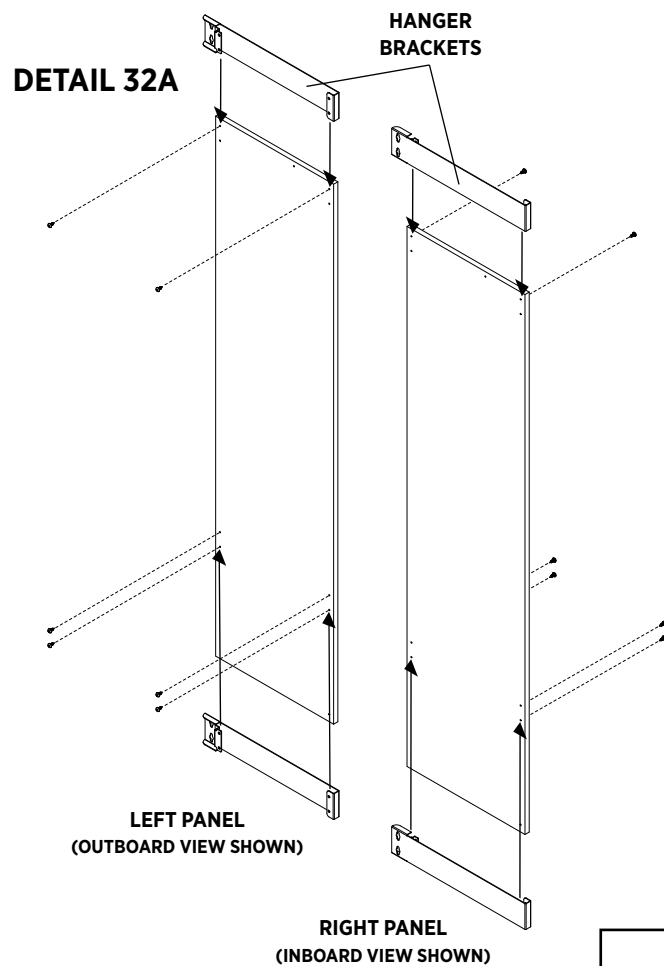

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.



Side Panel Kit Installation - 7.3

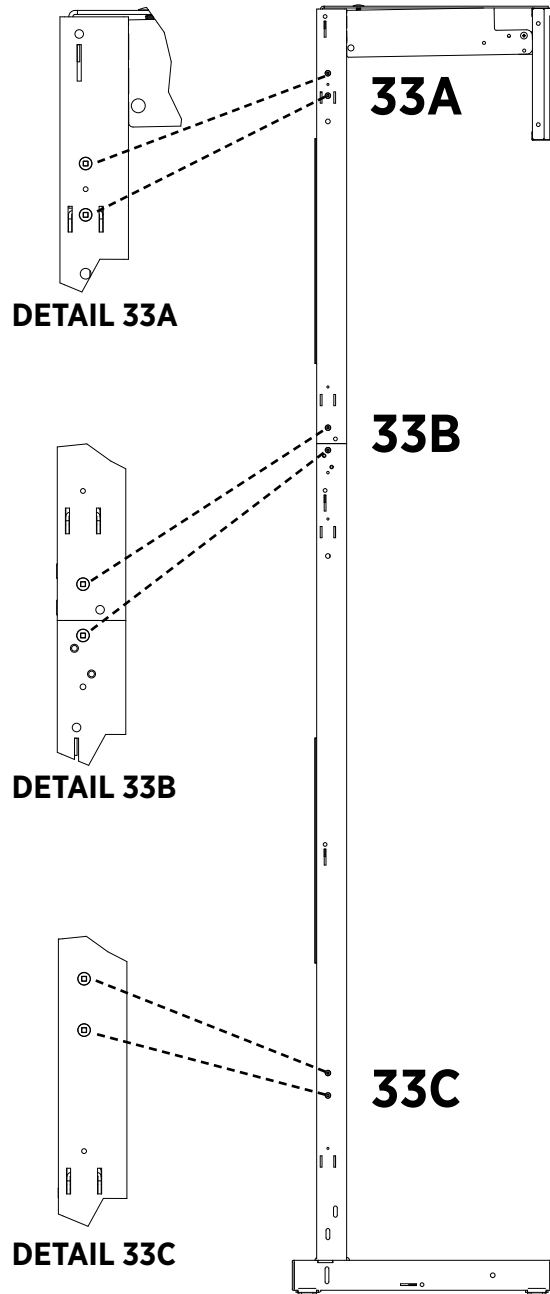

STEP 33: Install Side Panel Hanger Screws In Base Structure Uprights


- Install six (6) #10 x 0.500" Square Drive TEK Screws into holes in left outboard side of Structure Uprights. See detail drawings at left for screw position locations (**DETAIL 33A, 33B, 33C**).
- When installing screws, leave 1/8" space of exposed thread at each screw installation point to accommodate Side Panel installation in next step (**DETAIL 33D**).
- Repeat screw installation in same holes locations at the opposite end of Structural Assembly.

LEAVE 1/8" SPACE

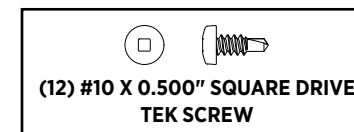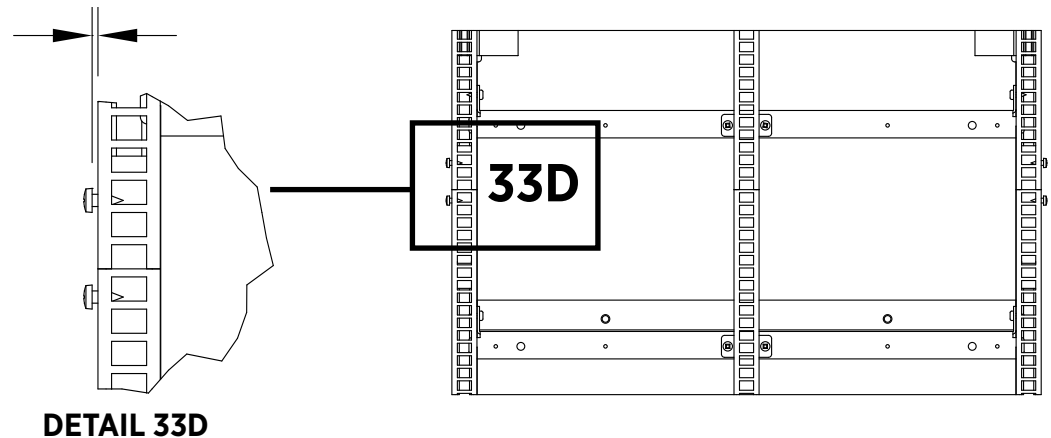

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.



Side Panel Kit Installation - 7.4

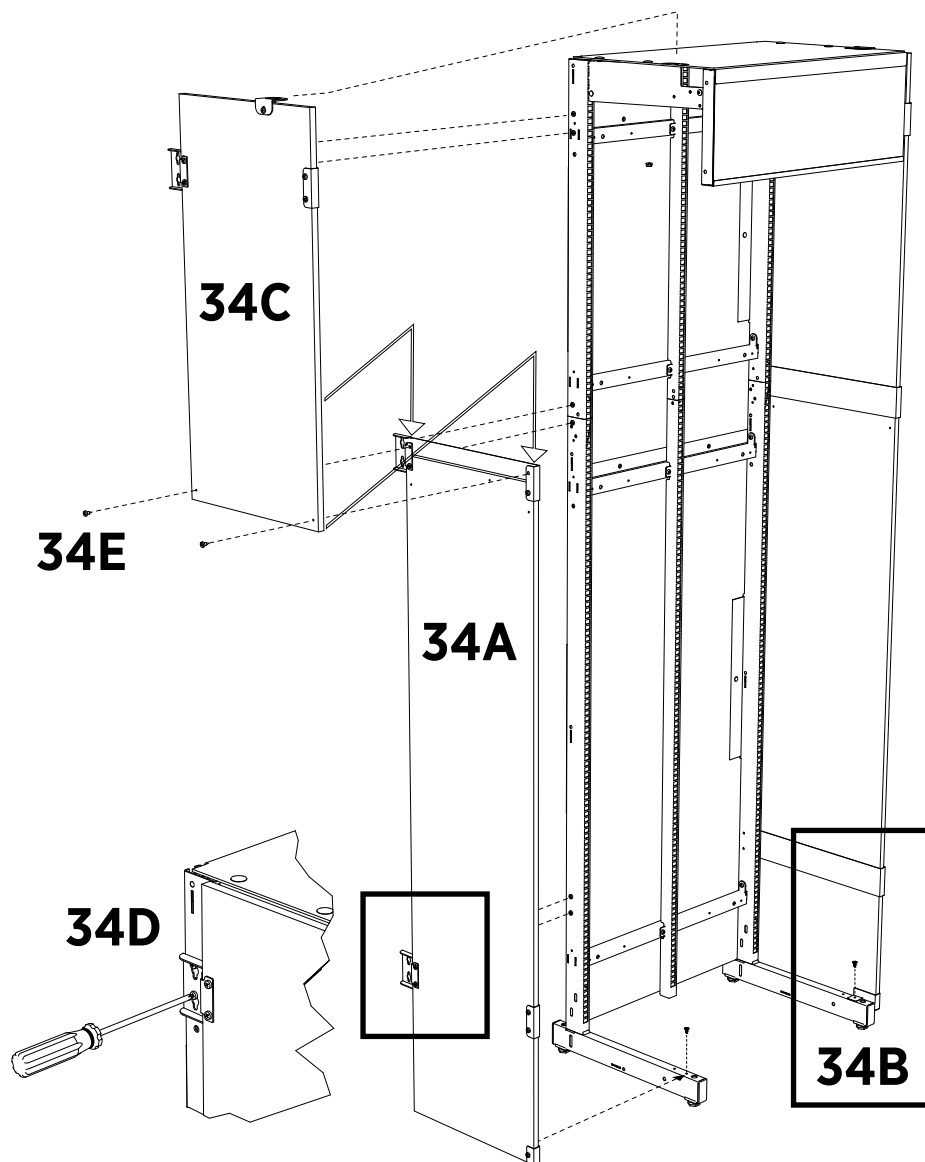

STEP 34: Attach Side Panel Assemblies To Fixture

- Attach Base Side Panel first. Align holes in hanging brackets over pairs of protruding screws installed in previous step **(DETAIL 34A)**. Do not tighten screws until instructed.
- Align hole in flange of toe bracket over hole in the top of horizontal leg before proceeding **(DETAIL 34B)**.
- Insert bottom edge of Extension Side Panel into the top of upper hanging bracket on Base Side Panel, then align hanging bracket on Extension Side Panel over screws on side of Standard Extension upright **(DETAIL 34C)**.
- Tighten screw pairs in uprights to secure side panel brackets to structural assembly **(DETAIL 34D)**.
- Install one (1) Push Pin through each Toe Bracket and into horizontal leg **(DETAIL 34B)**.
- Install two (2) Square Drive Sheet Metal Screws through top of each hanging bracket (on Base Side Panels) and into pre-drilled holes in each Extension Side Panel **(DETAIL 34E)**.
- Repeat above steps at opposite end of assembly.

34B

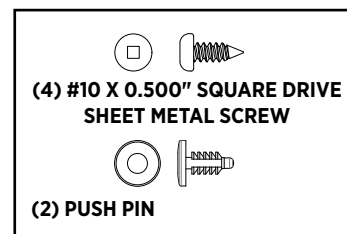
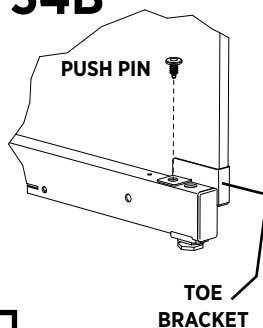


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Side Panel Kit Installation - 7.5

STEP 34 (continued): Install Hardware Into Top Hanger Tab Brackets

- Install one (1) Plastic Tree Clip through Top Hanger Tab Bracket on Extension Side Panel and into hole in top of Top Sign hanging bracket, as shown **(DETAIL 34F)**.
- Repeat installation of Plastic Tree Clip into Top Hanger Tab Bracket at opposite end of assembly.

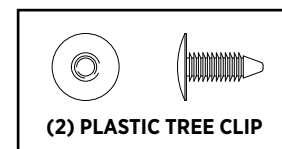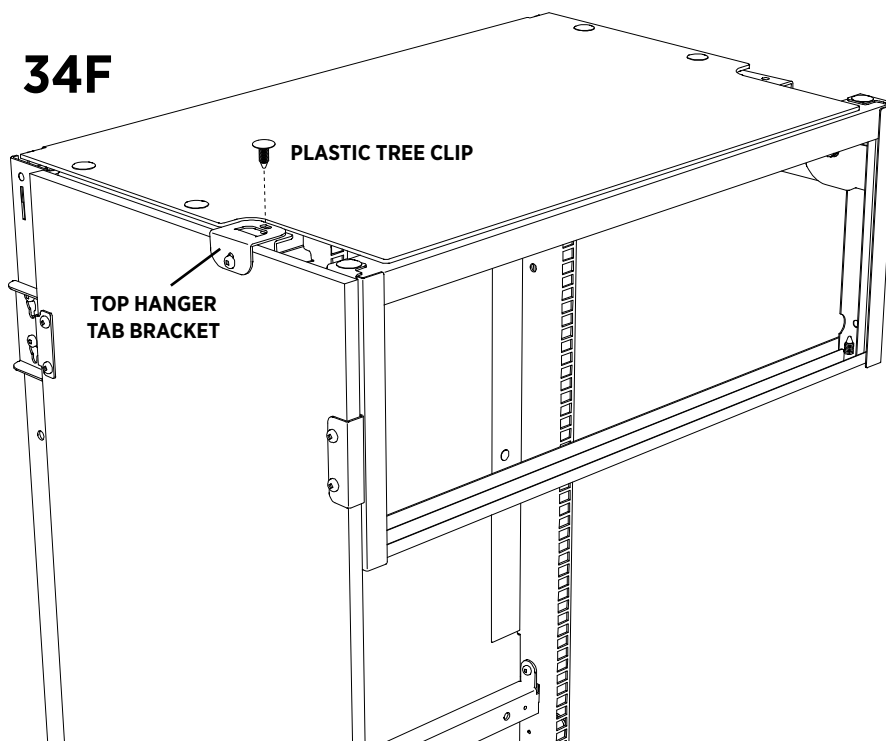


THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Pushers - 8.1

STEP 35: Identify Pusher Types



Identify pusher types and refer to your specific planogram for pusher layout.

- Review pusher installation and additional features, Steps 36-39.
- Proceed to pusher installation guide for 2 FT, 3 FT, and 4 FT shelves, Steps 40-43.
- Proceed to pusher installation guide for 1 FT shelves, Steps 44-45.

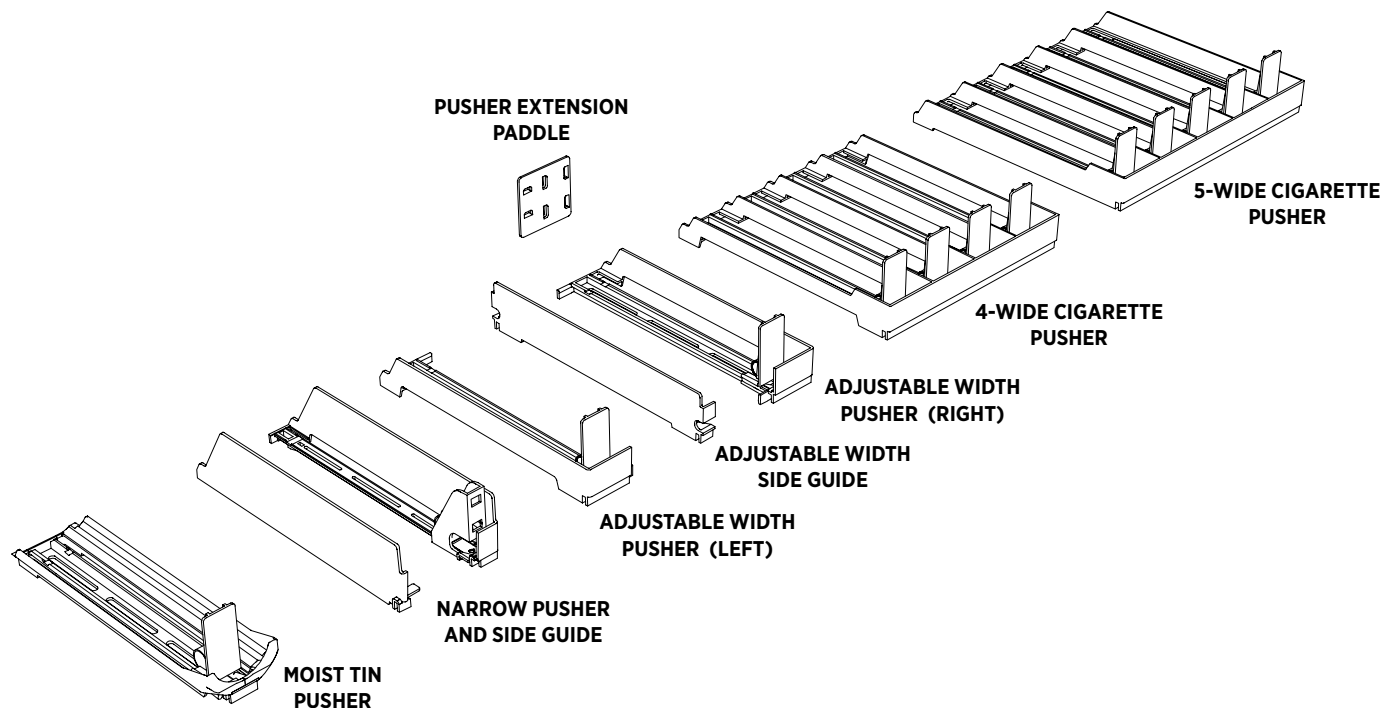

All pusher types and corresponding side guides attach over the protruding leg of retainer strip on 2 FT, 3 FT and 4 FT shelves.

Align channel on underside of each pusher type over protruding leg on retainer strip, and press firmly into place to secure.

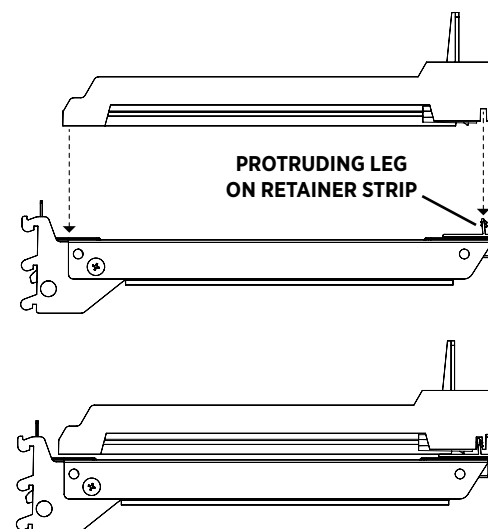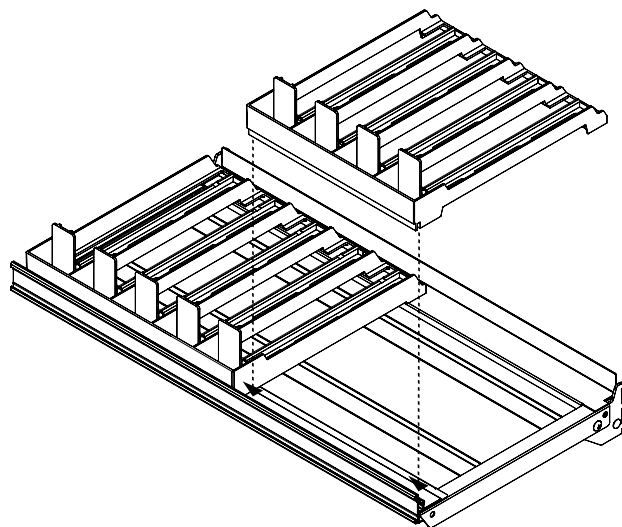



THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Pushers - 8.2

STEP 37: Snap-Off Spacing Tabs On Left And Right Adjustable Width Pushers

Adjustable Width Pushers have snap-off spacing tabs which allow tighter spacing between adjacent pushers to accommodate narrow product packaging.


Both front and back spacing tabs must be removed from the pusher cartridge (**DETAIL 37**).

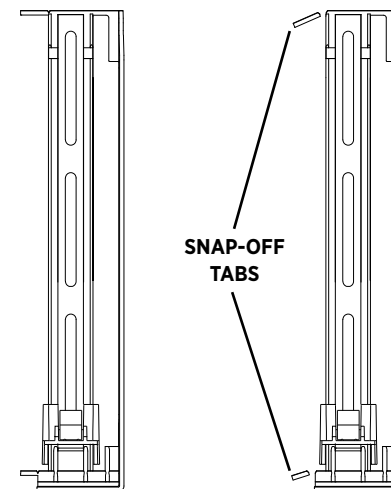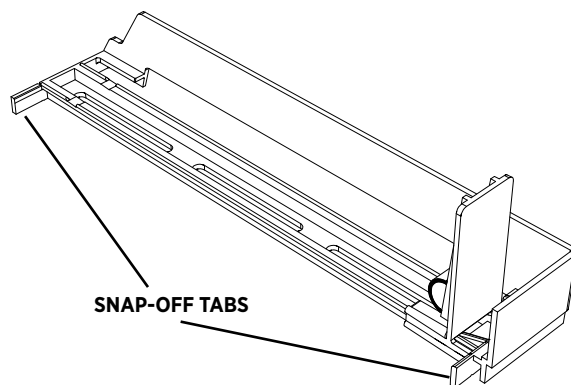

DETAIL 37 - TOP VIEW

STEP 38: Locking Pusher Paddle Feature


All pusher types feature a smooth-gliding locking pusher paddle for easy package loading. Push paddle all the way to the back of the cartridge until it locks into place. Gently push top of paddle back and slightly upward to release.

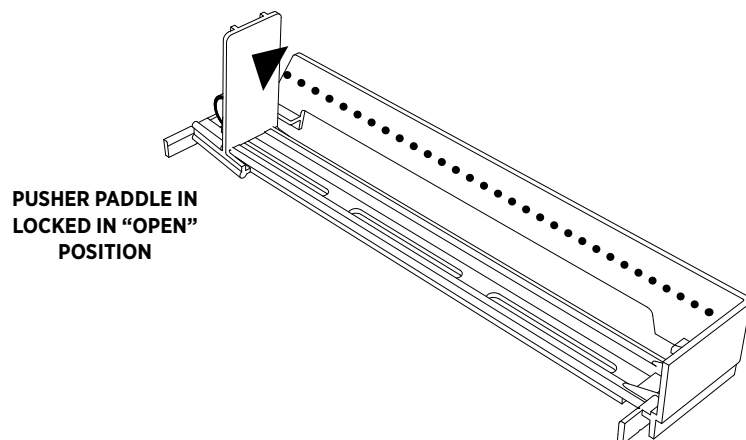

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.



STEP 39: Pusher Extension Paddles (Optional - OTP Applications)

Attach Pusher Extension Paddles over standard pusher paddles of Adjustable Width and Thinline Pushers to assist with pushing wide packages.

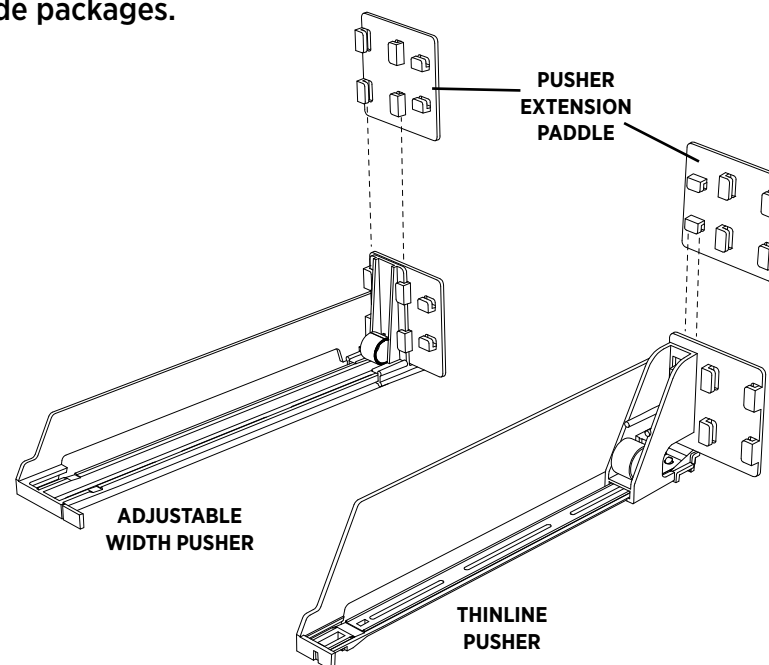


Install Pushers - 8.3


STEP 40: Pusher Installation Guide For Cigarette Pack Applications:

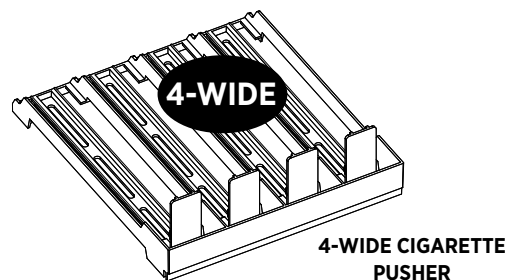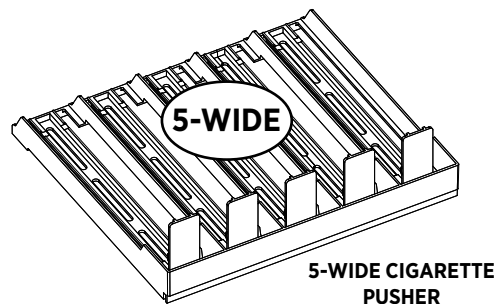


5-WIDE PUSHER (1), 4-WIDE PUSHER (1) - TOTAL PACK FACINGS (9)

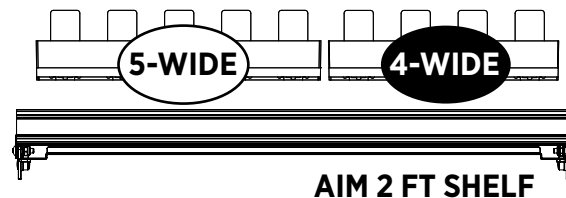


5-WIDE PUSHERS (2), 4-WIDE PUSHER (1) - TOTAL PACK FACINGS (14)

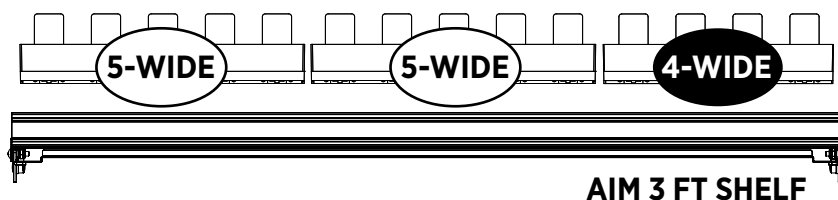

5-WIDE PUSHERS (3), 4-WIDE PUSHER (1) - TOTAL PACK FACINGS (19)

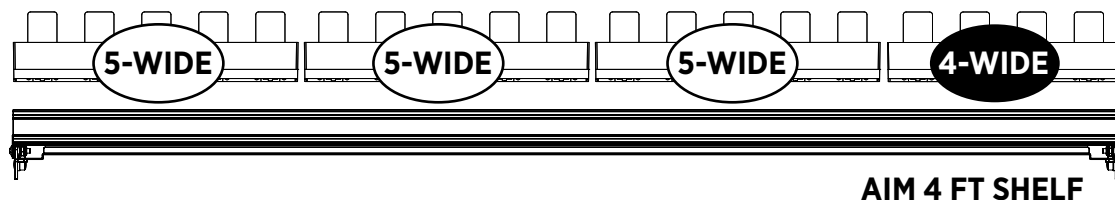

STEP 41: Pusher Installation Guide For OTP Package Applications:

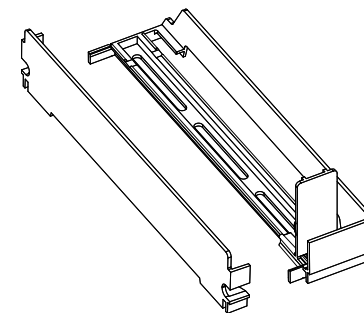

ADJUSTABLE WIDTH PUSHER AND SIDE GUIDE


STEP 1:

INSTALL SIDE GUIDE (1)



STEP 2:

INSTALL ADJUSTABLE WIDTH PUSHERS AS REQUIRED BASED ON PACKAGE WIDTHS

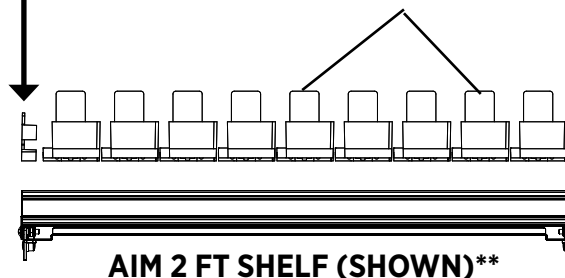


** LOADING INSTRUCTIONS FOR ADJUSTABLE WIDTH PUSHERS APPLY TO 2 FT, 3 FT AND 4 FT SHELF WIDTHS

WHEN TIGHTER SPACING IS REQUIRED, BREAK-OFF TABS CAN BE REMOVED. SEE STEP 36.


Install Pushers - 8.4

STEP 42: Pusher Installation Guide For Moist Tin Applications:

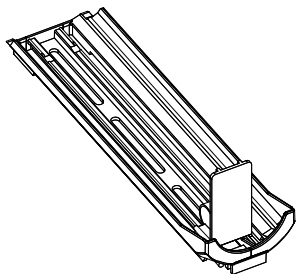


MOIST TIN PUSHER


MOIST TIN PUSHERS (8) – TOTAL TIN FACINGS (8)

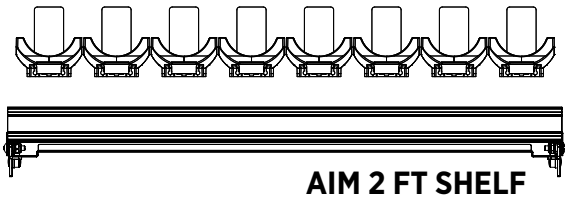


MOIST TIN PUSHERS (12) – TOTAL TIN FACINGS (12)

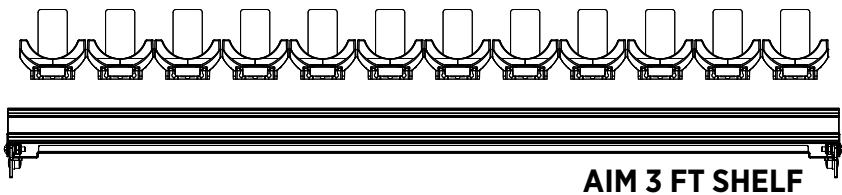

MOIST TIN PUSHERS (16) – TOTAL TIN FACINGS (16)

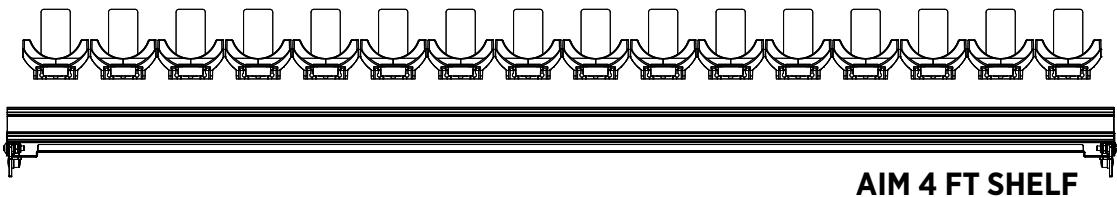

STEP 43: Pusher Installation Guide For Narrow Packaging Applications:

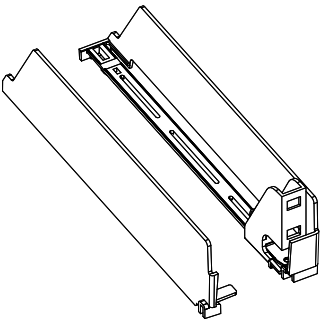

NARROW PUSHER
AND SIDE GUIDE


STEP 1:

INSTALL NARROW
SIDE GUIDE (1)



STEP 2:

INSTALL NARROW PUSHERS
AS REQUIRED BASED ON
PACKAGE WIDTHS

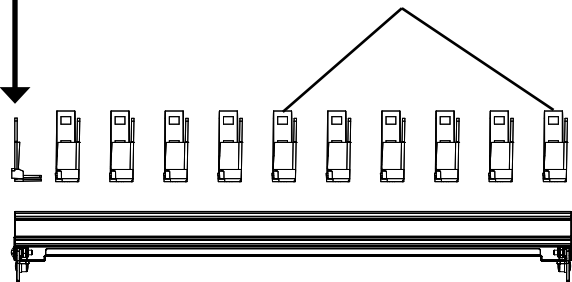

AIM 2 FT SHELF (SHOWN)**

** LOADING INSTRUCTIONS FOR NARROW PUSHERS
APPLY TO 2FT, 3FT AND 4FT SHELF WIDTHS


Install Pushers For 1FT Shelves ONLY - 8.5

STEP 44: Install Pushers Onto 1 FT Shelf



Refer to your specific planogram to determine quantity, type of pusher assembly required, and placement of 1 FT shelves throughout the fixture assembly.

Install pre-configured pusher assembly by inserting sliding tabs on the bottom of molded carrier into open slots on the back side of 1 FT shelf **(DETAIL 44A)**.

Slide carrier forward until front channel is seated over front edge of shelf **(DETAIL 44B)**.

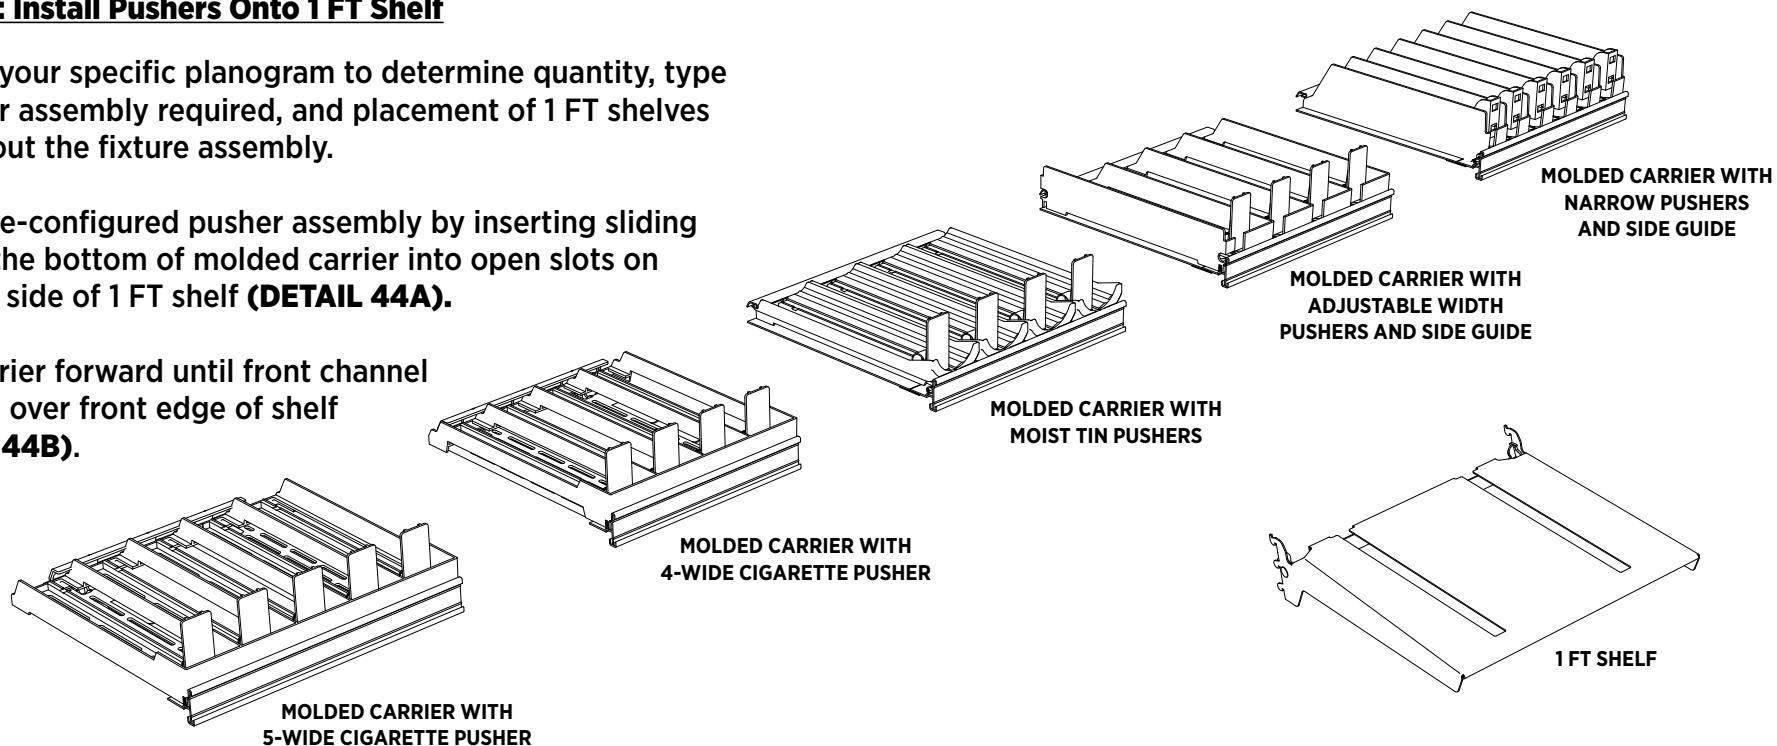


DETAIL 44A

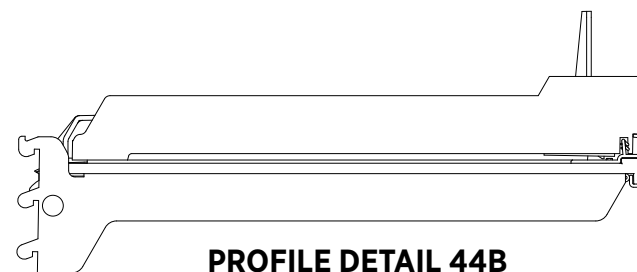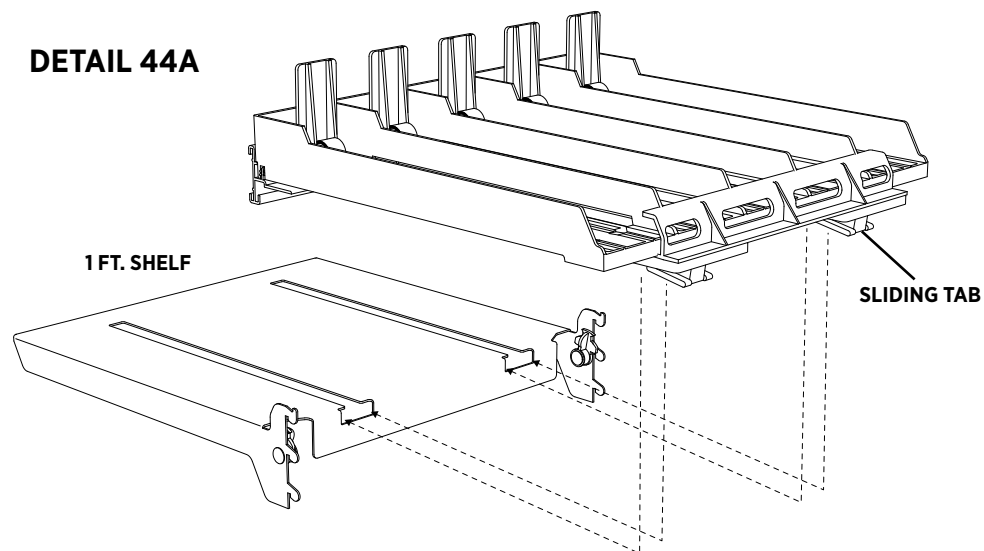

THE MANUFACTURER OF THIS MERCHANDISING SYSTEM ASSUMES NO LIABILITY FOR INJURY, DAMAGE OR LOSS OF PROPERTY AS A RESULT OF IMPROPER ASSEMBLY, INSTALLATION, AND/OR USE OF THIS DISPLAY.

Install Pushers For 1FT Shelves ONLY - 8.6


STEP 45 : 1 FT Shelf Installation Guide For Cigarette Pack Applications:

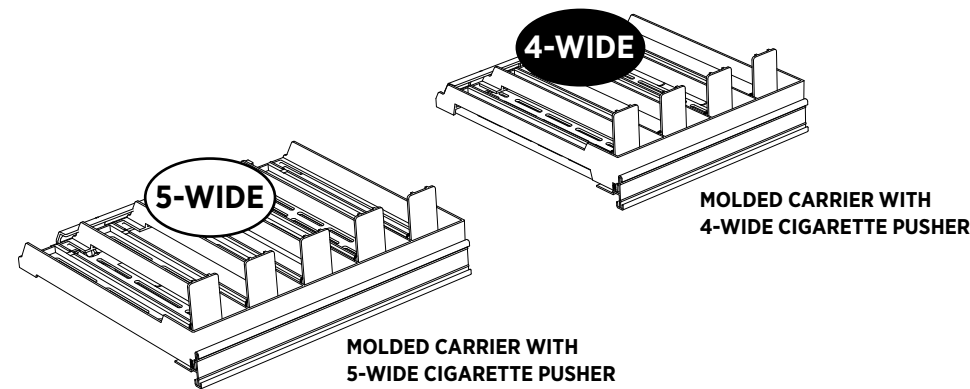


When installing adjacent 1 FT shelves with 5-wide and 4-wide cigarette pushers, refer to installation diagram below.

IMPORTANT: 1 FT shelf with 4-wide cigarette pusher must be installed at the right end of each row.


Carriers slide left or right, allowing for adjustment.

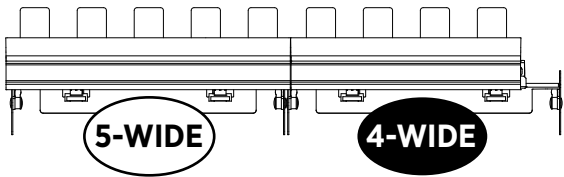

INSTALLATION GUIDE - ON 2 FT FIXTURE
5-WIDE PUSHER (1), 4-WIDE PUSHER (1) – TOTAL PACK FACINGS (9)

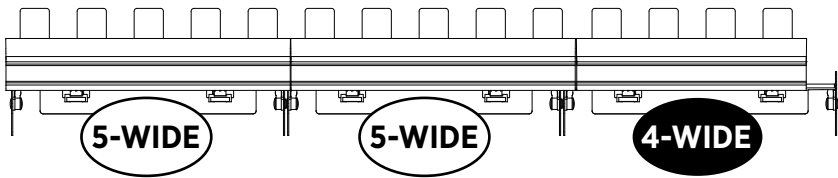

INSTALLATION GUIDE - ON 3 FT FIXTURE
5-WIDE PUSHERS (2), 4-WIDE PUSHER (1) – TOTAL PACK FACINGS (14)

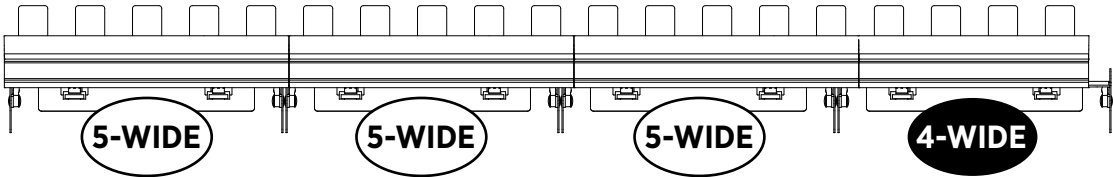

INSTALLATION GUIDE - ON 4 FT FIXTURE
5-WIDE PUSHERS (3), 4-WIDE PUSHER (1) – TOTAL PACK FACINGS (19)